

DAZZL

Dazzl™ is professional refrigeration equipment for retail.

Dazzl™ produces high-quality refrigeration and freezer equipment for shops of every format: discount stores, convenience stores, corner shops, supermarkets and hypermarkets. Modern design, functionality, and an attractive price are the key values of this brand of equipment, which helps to create ideal retail space in terms of function and style. When designing this equipment, we rely on our many years of experience in merchandizing, offer a large choice of versions, options, accessories and external décor.

Table of contents

Dazzl™ reserves the right to modify equipment specifications and design without prior notice.

Vega H210	4	Vega SG 080 H210 Plug-in	50	Sirius	86
Vega SG H210	11	Vega DG 080 H210 Plug-in	54	Astra	90
Vega DG H210	18	Vega 070 H195 Plug-in	60	Luna	94
Vega 090 H160	26	Vega SG 070 H195 Plug-in	64	Galaxy 080	100
Vega DG 090 H160	30	Vega DG 070 H195 Plug-in	68	Galaxy 090	104
Compass 090 H210	36	Vega 080 H160 Plug-in	72	Stella H130	106
Omega H210	42	Vega DG 080 H160 Plug-in	76	Stella H120	110
Vega 080 H210 Plug-in	46	Compass 080 H210 Plug-in	82	Stella H100	114

СЫРЫ



Vega 070/080/090/100 H210



Refrigerated shelving unit Vega will fit perfectly into an interior of any style.

Ergonomic design expands front-facing exposition to its maximum capacity and allows for displaying products on 6 lines of shelves. Innovative design solutions enhance energy efficiency. Various versions with different temperature profiles help to choose the ideal conditions for storing any fresh products.

The top lighting of the cabinet provides even distribution of light throughout the display and visibility of each product, thus guaranteeing effective presentation of the goods.

The wide range of accessories helps to customize the display cabinet to suit the shop's needs, makes the displayed products more attractive and optimizes the costs.





Standard version

- Innovative evaporator Sest, Italy
- Controller
- 5 lines of shelves with price tag holders
- Front color panels
- LED lighting in the top

Options

- See-through sidewalls or metal sidewalls with a mirror
- Additional LED lighting on the shelves
- Plexiglass internal volume partition
- Shelf space partition
- Wire fences
- Everything necessary to join cabinets in a line
- Electrical defrosting
- Everything necessary for displaying fruit
- Internal volume painted standard RAL colors
- Reinforced wooden packaging

Standard colors


Painted front panels



Custom-made version


Front panel painted any color from RAL chart

Vega 070 H210

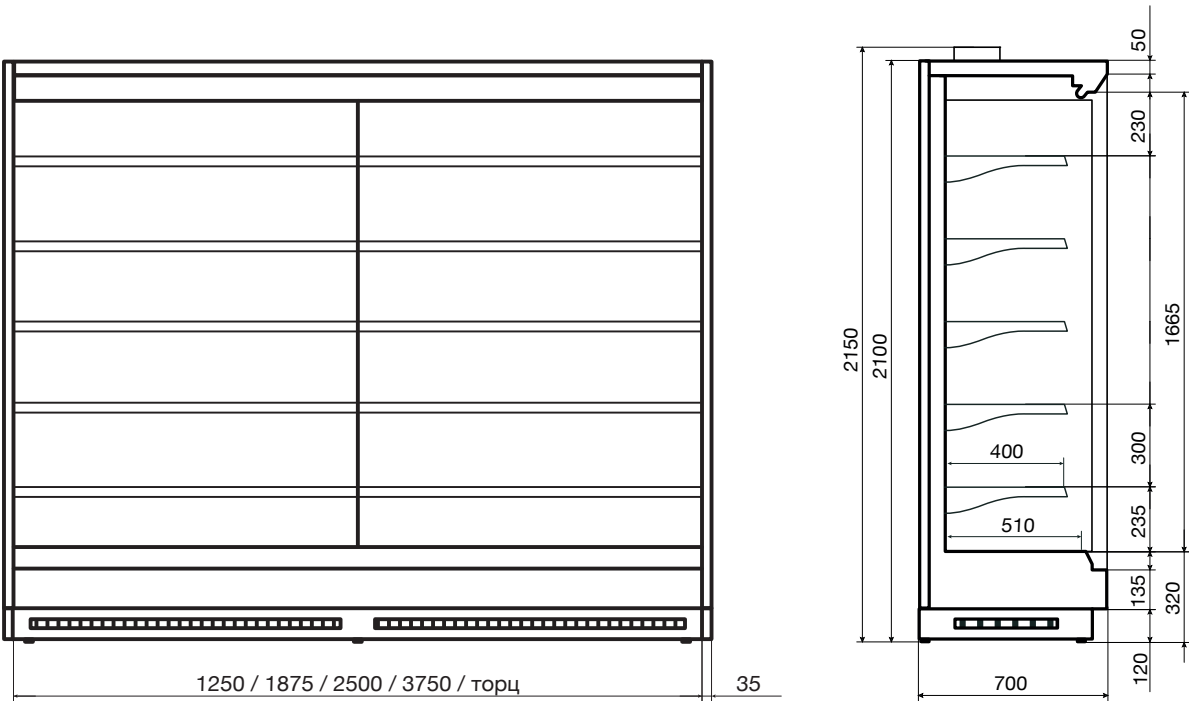


Dimensions					
Size type	125	190	250	375	end type
Display unit length without sidewalls, mm	1250	1875	2500	3750	1380
Display unit length with sidewalls, mm	1320	1945	2570	3820	1450
Display unit width, mm	700				
Display unit height, mm	2100				
Depth of displayed products, mm	400				
Bottom shelf depth, mm	500				
Loaded area, m²	3,6	5,4	7,3	10,9	4,0
Load volume, m³	0,85	1,28	1,70	2,54	0,93
Parameters					
Temperature range, °C	+1...+7				
Refrigeration capacity, kW	1,3	2,1	2,9	4,4	1,3
Power consumption, kW per 24 hours	2,96	3,05	4,67	6,37	3,11
Maximum capacity, kW	0,11	0,12	0,21	0,26	0,12
Temperature range, °C	−1...+2				
Refrigeration capacity, kW	1,54	2,48	3,41	5,2	1,54
Power consumption, kW per 24 hours	2,97	4,36	5,94	8,92	4,36
Maximum capacity, kW	0,11	0,17	0,24	0,36	0,17
Maximum current, A	0,61	0,61	0,89	1,21	0,61
Voltage, V	220				
Packaging					
Packaging width, mm	875				
Packaging height, mm	2320				
Packaging length, mm	1490	2110	2740	4010	1640
Net weight, kg	190	275	380	520	240
Gross weight, kg	220	305	460	590	310

Vega 080 H210

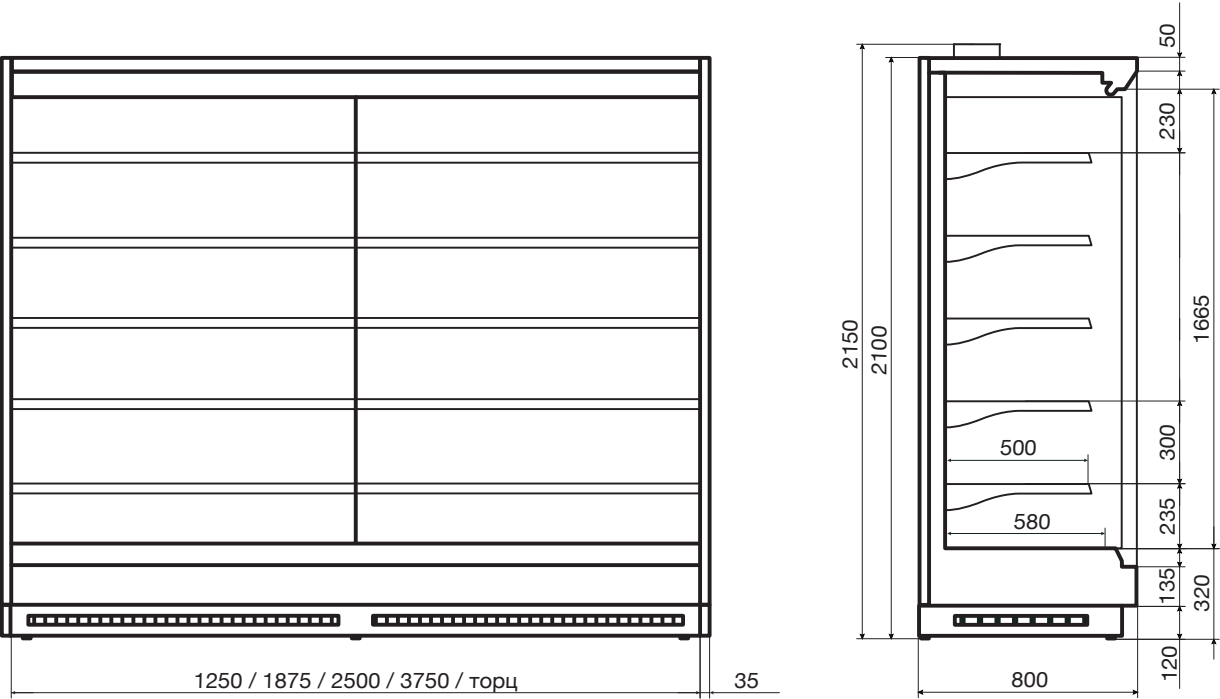


Dimensions					
Size type	125	190	250	375	end type
Display unit length without sidewalls, mm	1250	1875	2500	3750	1780
Display unit length with sidewalls, mm	1320	1945	2570	3820	1850
Display unit width, mm	900				
Display unit height, mm	2100				
Depth of displayed products, mm	500				
Bottom shelf depth, mm	680				
Loaded area, m²	4,7	7,0	9,2	13,8	6,5
Load volume, m³	1,15	1,70	2,30	3,40	1,60
Parameters					
Temperature range, °C	+1...+7				
Refrigeration capacity, kW	1,4	2,2	3	4,5	2,1
Power consumption, kW per 24 hours	2,96	3,05	4,67	6,37	3,11
Maximum capacity, kW	0,11	0,12	0,21	0,26	0,12
Temperature range, °C	−1...+2				
Refrigeration capacity, kW	1,64	2,58	3,5	5,3	2,46
Power consumption, kW per 24 hours	2,97	4,36	5,94	8,92	4,36
Maximum capacity, kW	0,11	0,17	0,24	0,36	0,17
Maximum current, A	0,61	0,61	0,89	1,21	0,61
Voltage, V	220				
Packaging					
Packaging width, mm	1075				
Packaging height, mm	2320				
Packaging length, mm	1490	2110	2740	4010	1990
Net weight, kg	210	300	390	530	340
Gross weight, kg	260	370	460	600	410

Vega 090 H210

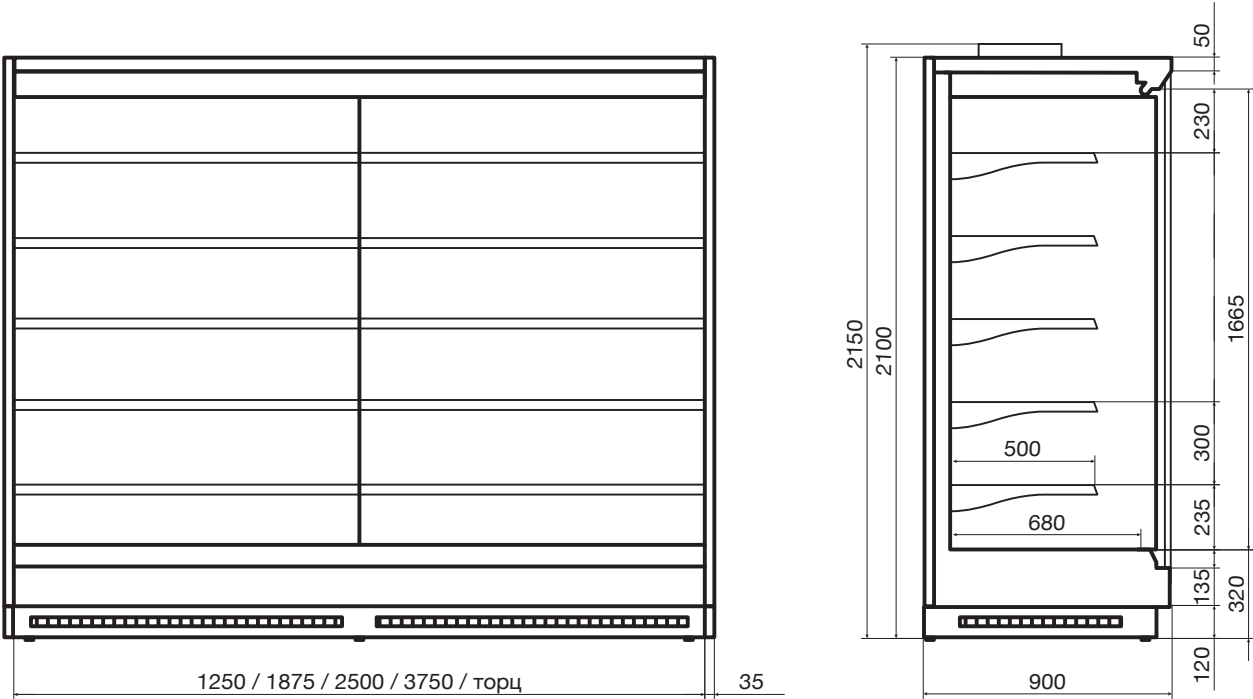

Dimensions					
Size type	125	190	250	375	end type
Display unit length without sidewalls, mm	1250	1875	2500	3750	1780
Display unit length with sidewalls, mm	1320	1945	2570	3820	1850
Display unit width, mm	900				
Display unit height, mm	2100				
Depth of displayed products, mm	500				
Bottom shelf depth, mm	680				
Loaded area, m²	4,7	7,0	9,2	13,8	6,5
Load volume, m³	1,15	1,70	2,30	3,40	1,60
Parameters					
Temperature range, °C	+1...+7				
Refrigeration capacity, kW	1,4	2,2	3	4,5	2,1
Power consumption, kW per 24 hours	2,96	3,05	4,67	6,37	3,11
Maximum capacity, kW	0,11	0,12	0,21	0,26	0,12
Temperature range, °C	−1...+2				
Refrigeration capacity, kW	1,64	2,58	3,5	5,3	2,46
Power consumption, kW per 24 hours	2,97	4,36	5,94	8,92	4,36
Maximum capacity, kW	0,11	0,17	0,24	0,36	0,17
Maximum current, A	0,61	0,61	0,89	1,21	0,61
Voltage, V	220				
Packaging					
Packaging width, mm	1075				
Packaging height, mm	2320				
Packaging length, mm	1490	2110	2740	4010	1990
Net weight, kg	210	300	390	530	340
Gross weight, kg	260	370	460	600	410

Vega 100 H210

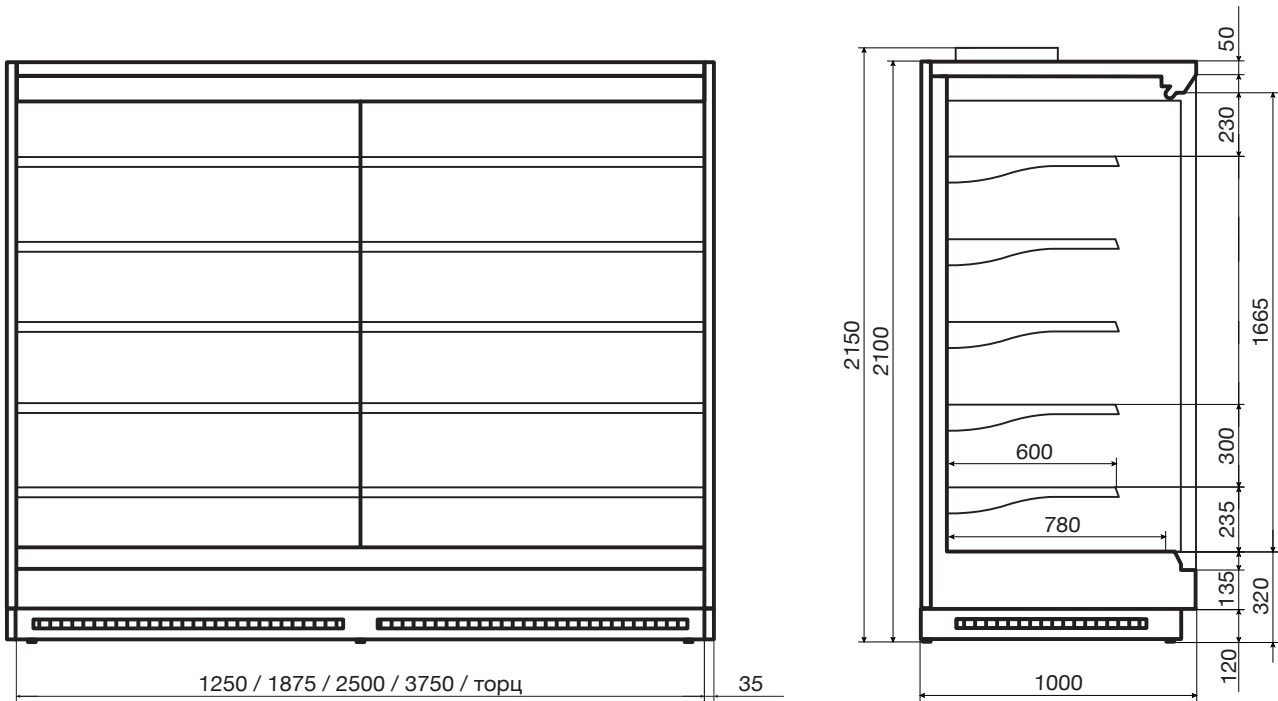

Dimensions					
Size type	125	190	250	375	end type
Display unit length without sidewalls, mm	1250	1875	2500	3750	1980
Display unit length with sidewalls, mm	1320	1945	2570	3820	2050
Display unit width, mm	1000				
Display unit height, mm	2100				
Depth of displayed products, mm	600				
Bottom shelf depth, mm	780				
Loaded area, m²	5,5	8,3	11,0	16,4	8,7
Load volume, m³	1,28	1,94	2,55	3,83	2,02
Parameters					
Temperature range, °C	+1...+7				
Refrigeration capacity, kW	1,5	2,3	3,1	4,6	2,3
Power consumption, kW per 24 hours	2,96	3,05	4,67	6,37	3,11
Maximum capacity, kW	0,11	0,12	0,21	0,26	0,12
Temperature range, °C	−1...+2				
Refrigeration capacity, kW	1,64	2,58	3,51	5,3	2,58
Power consumption, kW per 24 hours	2,97	4,36	5,94	8,92	4,36
Maximum capacity, kW	0,11	0,17	0,24	0,36	0,17
Maximum current, A	0,61	0,61	0,89	1,21	0,61
Voltage, V	220				
Packaging					
Packaging width, mm	1175				
Packaging height, mm	2320				
Packaging length, mm	1490	2110	2740	4010	2240
Net weight, kg	220	310	420	560	345
Gross weight, kg	270	380	480	630	415

Vega SG 070/080/090/100 H210



Easy access to the products and irresistible aesthetics create a perfect impression for the buyer.



Ergonomic design

expands front-facing exposition to its maximum capacity and allows for displaying products on 6 lines of shelves. Innovative design solutions enhance energy efficiency. Various versions with different temperature profiles help to choose the ideal conditions for storing any fresh products.

Energy-saving

surfaces reduce infiltration of cold air from the internal volume of the cabinet into the retail space and provide for supremely efficient operation.

The wide range of accessories

helps to customize the display cabinet to suit the shop's needs, makes the displayed products more attractive and optimizes the costs.



Standard version

- Energy-efficient door system SG. The doors of this system are made from 6-mm tempered glass with a low-emission hardcoat
- Innovative evaporator Sest, Italy
- Controller
- 5 lines of shelves with price tag holders
- Front color panels
- LED lighting in the top

Options

- See-through sidewalls or metal sidewalls with a mirror
- Additional LED lighting on the shelves
- Plexiglass internal volume partition
- Shelf space partition
- Wire fences
- Everything necessary to join cabinets in a line
- Electrical defrosting
- Everything necessary for displaying fruit
- Internal volume painted standard RAL colors
- Reinforced wooden packaging

Standard colors


Painted front panels

		
RAL 9003	RAL 9006	RAL 9005
		
RAL 3004	RAL 7024	RAL 1016
		
RAL 6018	RAL 3020	RAL 5017
		
RAL 1015		

Custom-made version


Front panel painted any color from RAL chart

Vega SG 070 H210

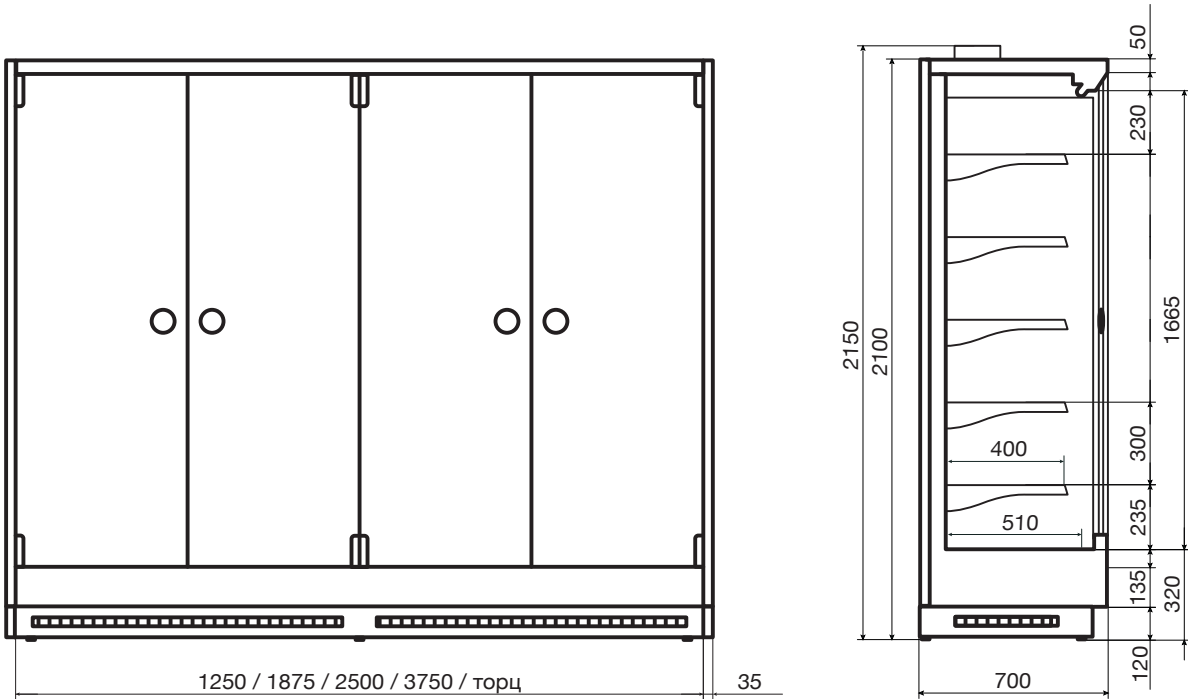


Dimensions					
Size type	125	190	250	375	end type
Display unit length without sidewalls, mm	1250	1875	2500	3750	1380
Display unit length with sidewalls, mm	1320	1945	2570	3820	1450
Display unit width, mm	700				
Display unit height, mm	2100				
Depth of displayed products, mm	400				
Bottom shelf depth, mm	500				
Loaded area, m²	3,6	5,4	7,3	10,9	4,0
Load volume, m³	0,85	1,28	1,70	2,54	0,93
Parameters					
Temperature range, °C	+1...+7				
Refrigeration capacity, kW	0,89	1,2	1,62	2,4	0,89
Power consumption, kW per 24 hours	2,96	3,05	4,67	6,37	3,11
Maximum capacity, kW	0,11	0,12	0,21	0,26	0,12
Maximum current, A	0,61	0,61	0,89	1,21	0,61
Voltage, V	220				
Packaging					
Packaging width, mm	875				
Packaging height, mm	2320				
Packaging length, mm	1490	2110	2740	4010	1640
Net weight, kg	200	330	390	540	250
Gross weight, kg	240	320	480	610	330

Vega SG 080 H210

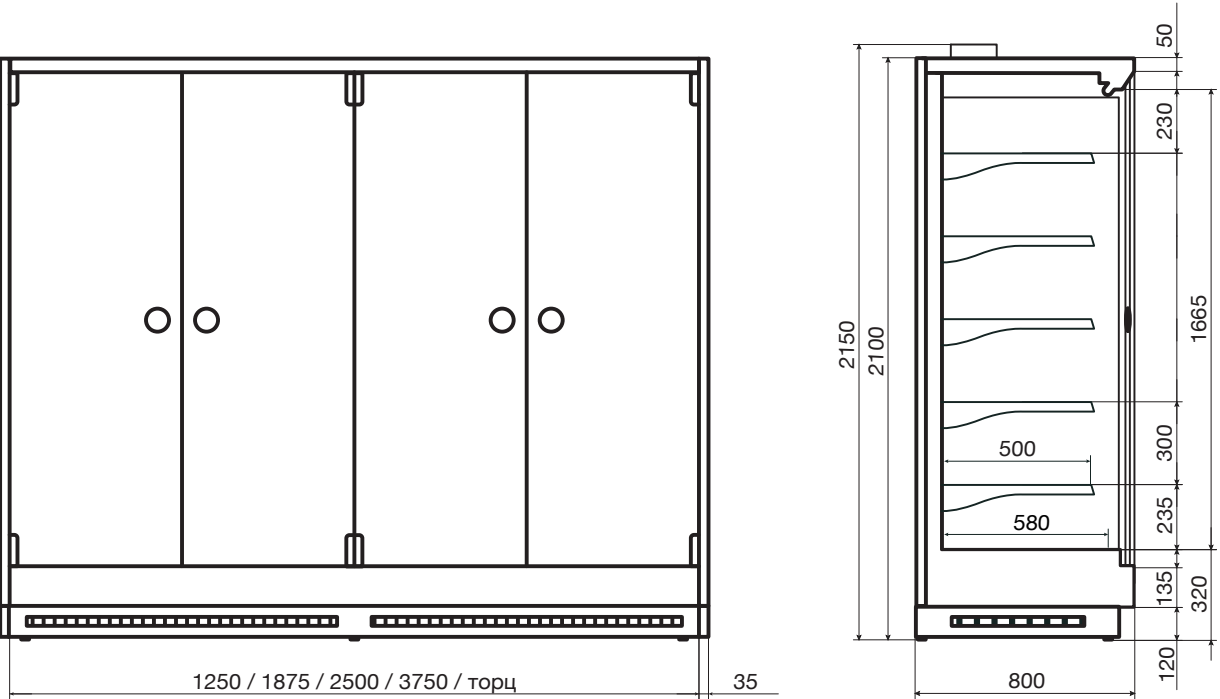


Dimensions					
Dimensions	125	190	250	375	end type
Size type	1250	1875	2500	3750	1580
Display unit length without sidewalls, mm	1320	1945	2570	3820	1650
Display unit length with sidewalls, mm	800				
Display unit width, mm	2100				
Display unit height, mm	500				
Depth of displayed products, mm	680				
Bottom shelf depth, mm	4,4	6,7	9,0	13,3	6,0
Loaded area, m²	1,05	1,58	2,11	3,17	1,34
Load volume, m³					
Parameters	+1 ... +7				
Temperature range, °C	0,9	1,5	2	3	1,3
Refrigeration capacity, kW	2,96	3,05	4,67	6,37	3,11
Power consumption, kW per 24 hours	0,11	0,12	0,21	0,26	0,12
Maximum capacity, kW	0,61	0,61	0,89	1,21	0,61
Maximum current, A	220				
Voltage, V					
Packaging	975				
Packaging width, mm	2320				
Packaging height, mm	1490	2110	2740	4010	1840
Packaging length, mm	210	340	430	580	300
Net weight, kg	260	385	480	680	380
Gross weight, kg					

Vega SG 090 H210

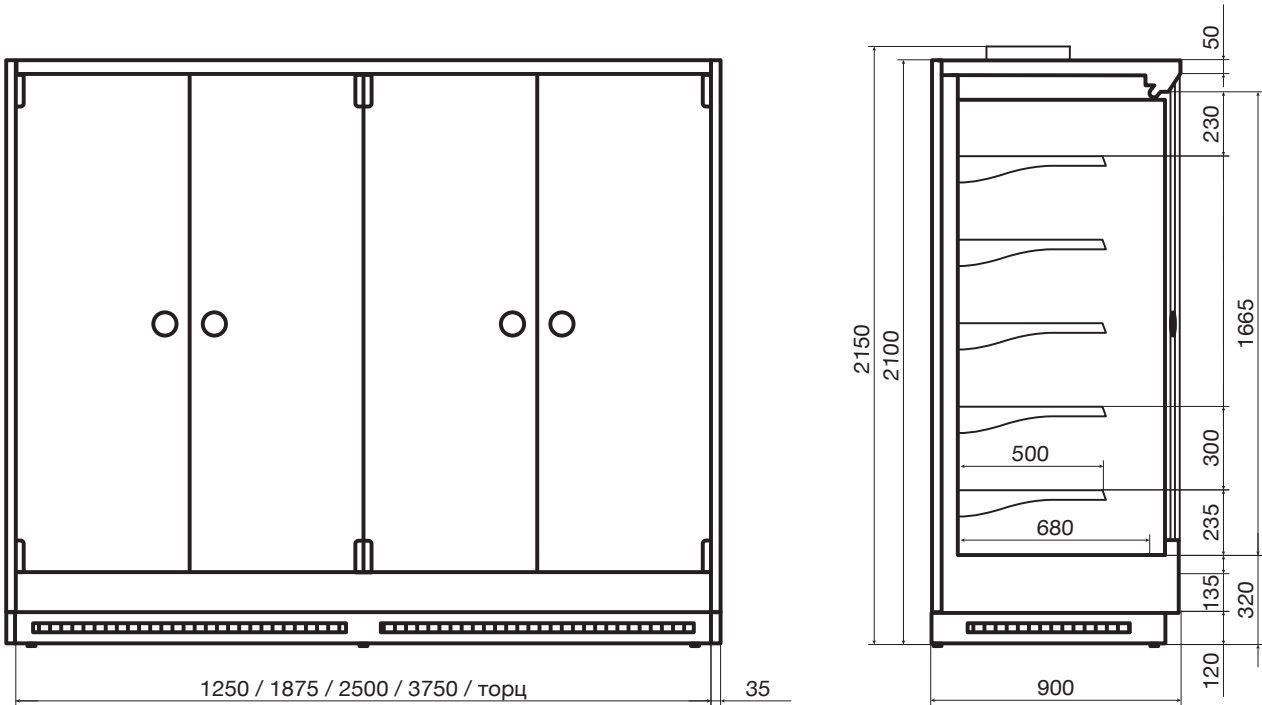

Dimensions					
Size type	125	190	250	375	end type
Display unit length without sidewalls, mm	1250	1875	2500	3750	1780
Display unit length with sidewalls, mm	1320	1945	2570	3820	1850
Display unit width, mm	900				
Display unit height, mm	2100				
Depth of displayed products, mm	500				
Bottom shelf depth, mm	680				
Loaded area, m²	4,7	7,0	9,2	13,8	6,5
Load volume, m³	1,15	1,70	2,30	3,40	1,60
Parameters					
Temperature range, °C	+1...+7				
Refrigeration capacity, kW	0,99	1,55	2,11	3,14	1,46
Power consumption, kW per 24 hours	2,96	3,05	4,67	6,37	3,11
Maximum capacity, kW	0,11	0,12	0,21	0,26	0,12
Maximum current, A	0,61	0,61	0,89	1,21	0,61
Voltage, V	220				
Packaging					
Packaging width, mm	1075				
Packaging height, mm	2320				
Packaging length, mm	1490	2110	2740	4010	1990
Net weight, kg	220	315	410	550	350
Gross weight, kg	280	385	480	620	420

Vega SG 100 H210

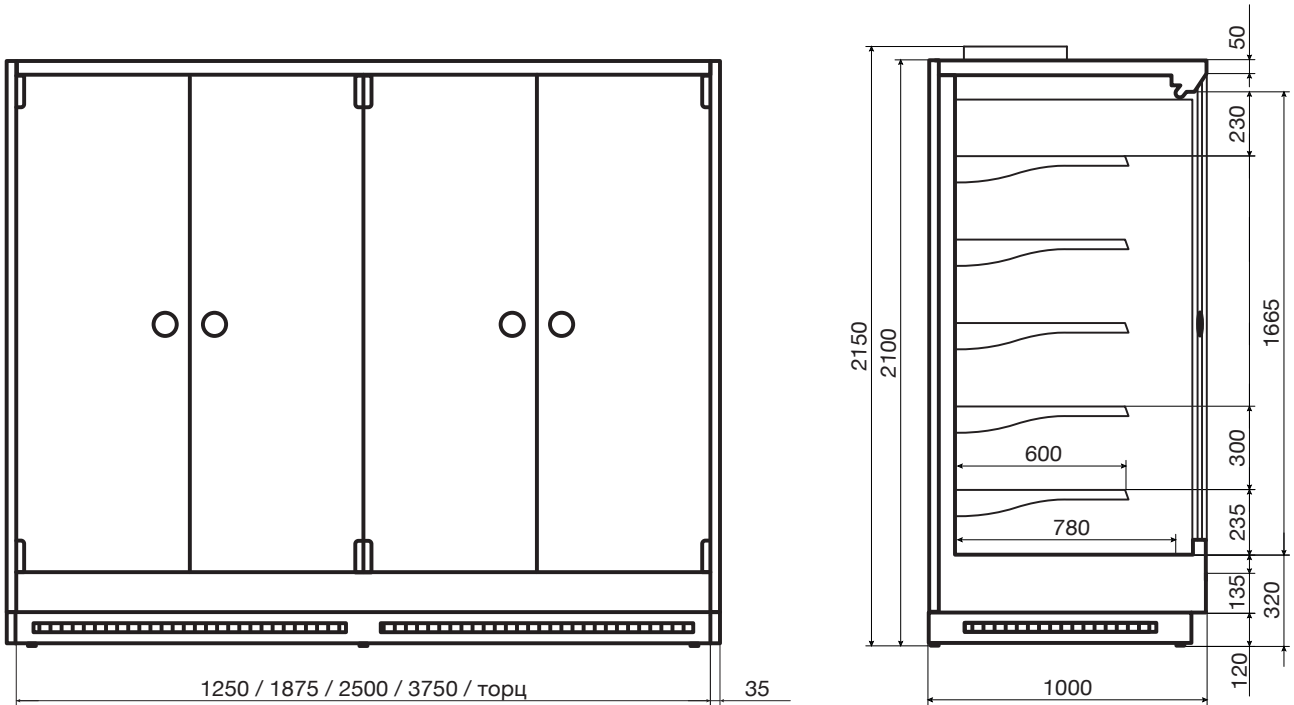

Dimensions					
Size type	125	190	250	375	end type
Display unit length without sidewalls, mm	1250	1875	2500	3750	1980
Display unit length with sidewalls, mm	1320	1945	2570	3820	2050
Display unit width, mm	1000				
Display unit height, mm	2100				
Depth of displayed products, mm	600				
Bottom shelf depth, mm	780				
Loaded area, m²	5,5	8,3	11,0	16,4	8,7
Load volume, m³	1,28	1,94	2,55	3,83	2,02
Parameters					
Temperature range, °C	+1...+7				
Refrigeration capacity, kW	0,98	1,54	2,1	3,15	1,54
Power consumption, kW per 24 hours	2,96	3,05	4,67	6,37	3,11
Maximum capacity, kW	0,11	0,12	0,21	0,26	0,12
Maximum current, A	0,61	0,61	0,89	1,21	0,61
Voltage, V	220				
Packaging					
Packaging width, mm	1175				
Packaging height, mm	2320				
Packaging length, mm	1490	2110	2740	4010	2240
Net weight, kg	230	345	440	560	355
Gross weight, kg	290	395	500	630	440

Vega DG 070/080/090/100 H210



Easy access to the products and irresistible aesthetics create a perfect impression for the buyer.

Ergonomic design expands front-facing exposition to its maximum capacity and allows for displaying products on 6 lines of shelves. Innovative design solutions enhance energy efficiency. Various versions with different temperature profiles help to choose the ideal conditions for storing any fresh products.

The top lighting of the cabinet provides even distribution of light throughout the display and visibility of each product, thus guaranteeing effective presentation of the goods.

The wide range of accessories helps to customize the display cabinet to suit the shop's needs, makes the displayed products more attractive and optimizes the costs.





Standard version

- Energy-efficient door system DG made from insulated glass units with a low-emission coating
- Innovative evaporator Sest, Italy
- Controller
- 5 lines of shelves with price tag holders
- Front color panels
- LED lighting in the top

Options

- See-through sidewalls or metal sidewalls with a mirror
- Additional LED lighting on the shelves
- Plexiglass internal volume partition
- Shelf space partition
- Wire fences
- Everything necessary to join cabinets in a line
- Electrical defrosting
- Everything necessary for displaying fruit
- Internal volume painted standard RAL colors
- Reinforced wooden packaging

Standard colors


Painted front panels

		
RAL 9003	RAL 9006	RAL 9005
		
RAL 3004	RAL 7024	RAL 1016
		
RAL 6018	RAL 3020	RAL 5017
		
RAL 1015		

Custom-made version


Front panel painted any color from RAL chart

Vega DG 070 H210

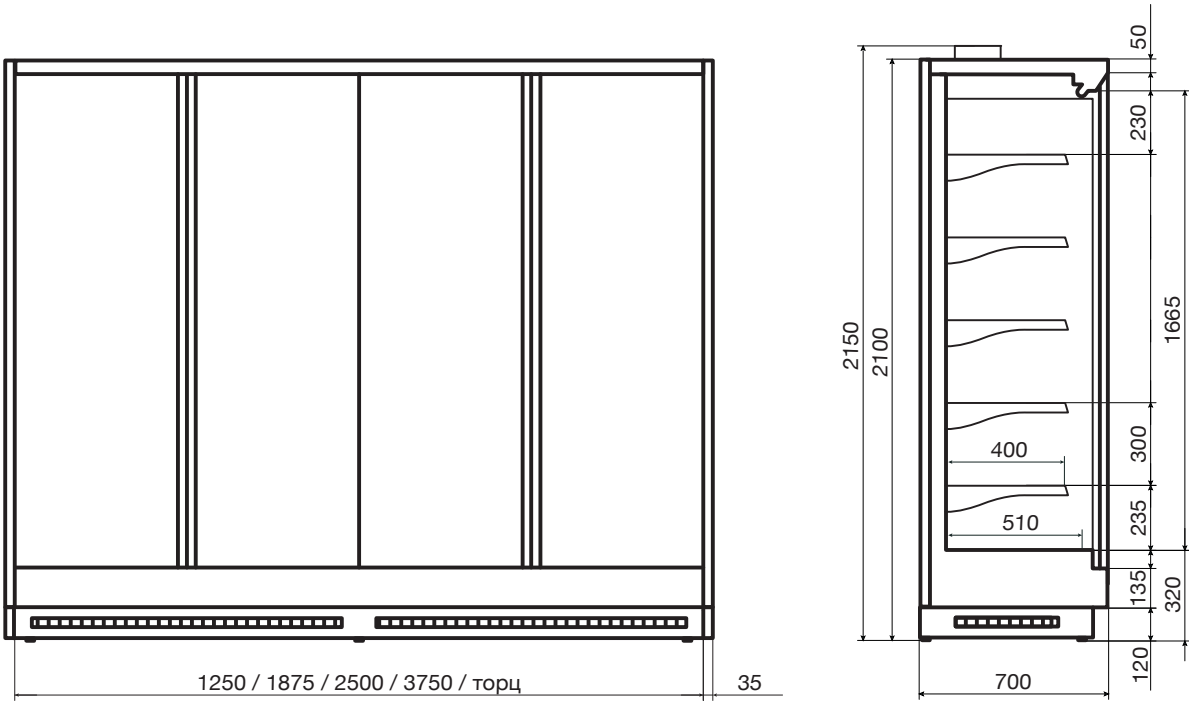


Dimensions					
Size type	125	190	250	375	end type
Display unit length without sidewalls, mm	1250	1875	2500	3750	1380
Display unit length with sidewalls, mm	1320	1945	2570	3820	1450
Display unit width, mm	700				
Display unit height, mm	2100				
Depth of displayed products, mm	400				
Bottom shelf depth, mm	500				
Loaded area, m²	3,6	5,4	7,3	10,9	4,0
Load volume, m³	0,85	1,28	1,70	2,54	0,93
Parameters					
Temperature range, °C	+1...+7				
Refrigeration capacity, kW	0,59	0,8	1,08	1,56	0,59
Power consumption, kW per 24 hours	3,59	3,8	5,89	8,19	3,75
Maximum capacity, kW	0,14	0,17	0,24	0,36	0,17
Maximum current, A	0,7	0,7	1,21	1,54	0,7
Voltage, V	220				
Packaging					
Packaging width, mm	875				
Packaging height, mm	2320				
Packaging length, mm	1490	2110	2740	4010	1640
Net weight, kg	220	350	410	560	270
Gross weight, kg	260	340	500	630	350

Vega DG 080 H210

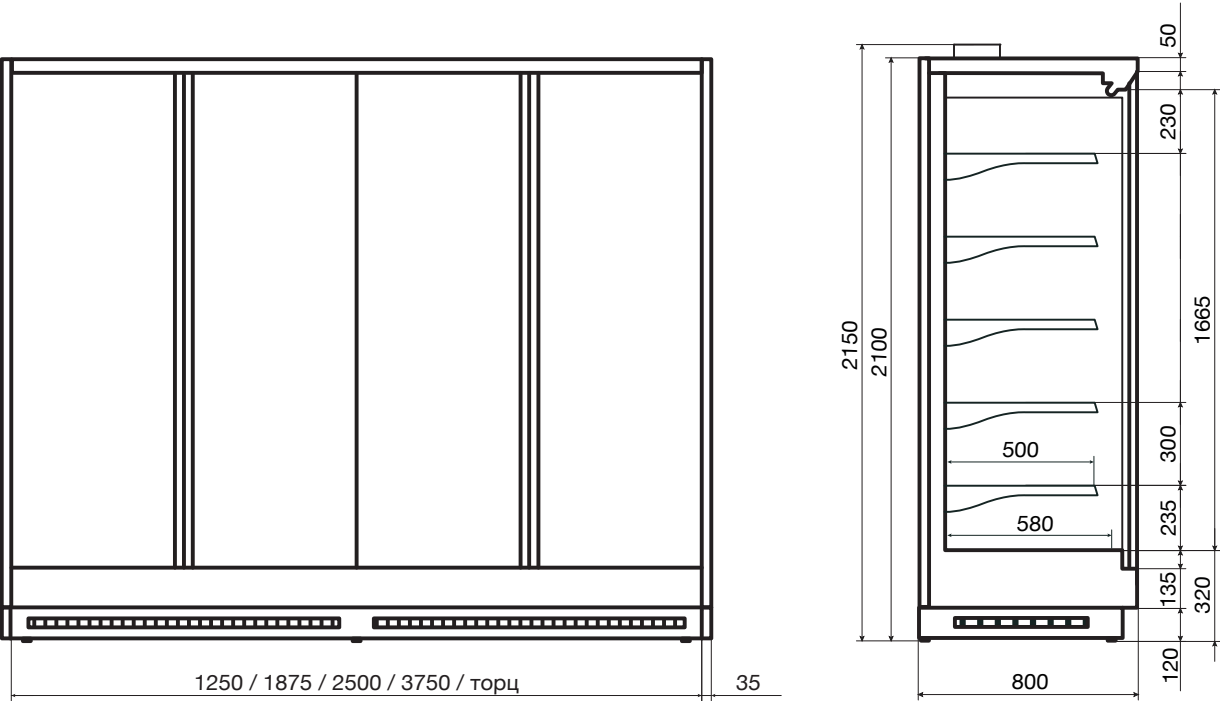


Dimensions					
Size type	125	190	250	375	end type
Display unit length without sidewalls, mm	1250	1875	2500	3750	1580
Display unit length with sidewalls, mm	1320	1945	2570	3820	1650
Display unit width, mm	800				
Display unit height, mm	2100				
Depth of displayed products, mm	500				
Bottom shelf depth, mm	680				
Loaded area, m²	4,4	6,7	9,0	13,3	6,0
Load volume, m³	1,05	1,58	2,11	3,17	1,34
Parameters					
Temperature range, °C	+1 ... +7				
Refrigeration capacity, kW	0,65	1,05	1,4	2,2	1,1
Power consumption, kW per 24 hours	3,59	3,8	5,89	8,19	3,75
Maximum capacity, kW	0,14	0,17	0,24	0,36	0,17
Maximum current, A	0,7	0,7	1,21	1,54	0,7
Voltage, V	220				
Packaging					
Packaging width, mm	975				
Packaging height, mm	2320				
Packaging length, mm	1490	2110	2740	4010	1840
Net weight, kg	230	360	450	620	320
Gross weight, kg	280	400	490	660	420

Vega DG 090 H210

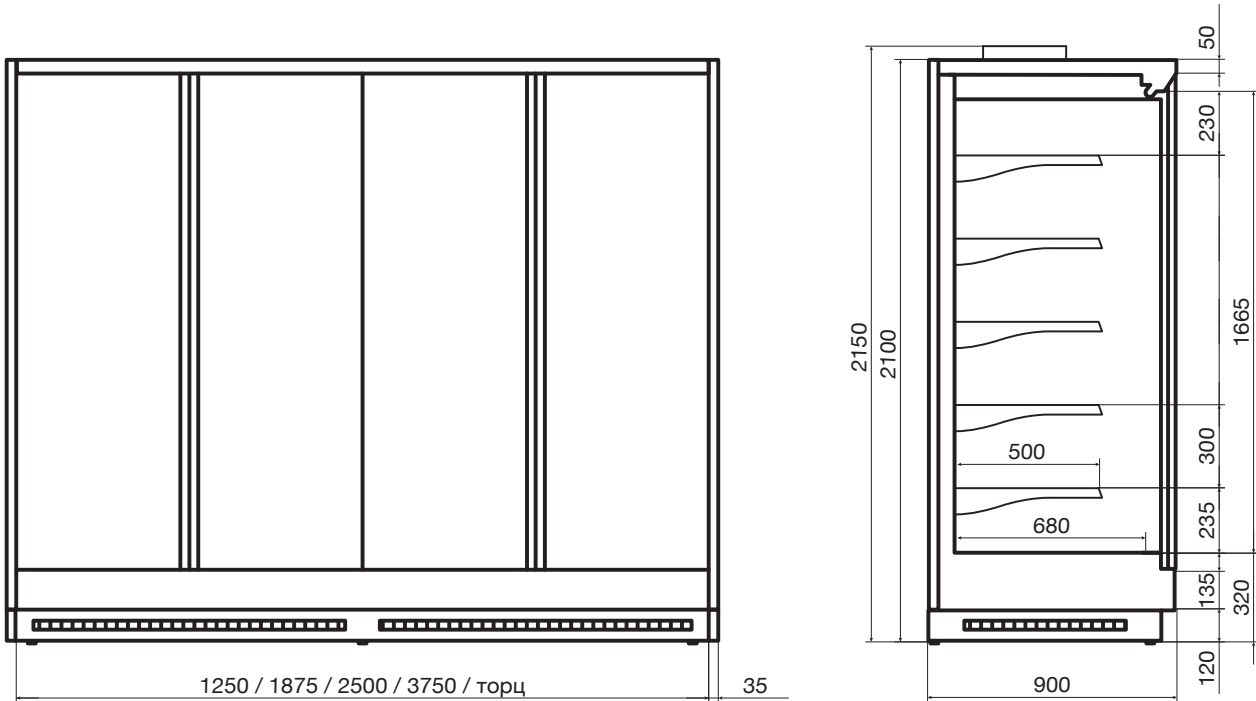

Dimensions					
Size type	125	190	250	375	end type
Display unit length without sidewalls, mm	1250	1875	2500	3750	1780
Display unit length with sidewalls, mm	1320	1945	2570	3820	1850
Display unit width, mm	900				
Display unit height, mm	2100				
Depth of displayed products, mm	500				
Bottom shelf depth, mm	680				
Loaded area, m²	4,7	7,0	9,2	13,8	6,5
Load volume, m³	1,15	1,70	2,30	3,40	1,60
Parameters					
Temperature range, °C	+1...+7				
Refrigeration capacity, kW	0,65	1,05	1,4	2,2	1,1
Power consumption, kW per 24 hours	3,59	3,8	5,89	8,19	3,75
Maximum capacity, kW	0,14	0,17	0,24	0,36	0,17
Maximum current, A	0,7	0,7	1,21	1,54	0,7
Voltage, V	220				
Packaging					
Packaging width, mm	1075				
Packaging height, mm	2320				
Packaging length, mm	1490	2110	2740	4010	1990
Net weight, kg	240	325	430	600	365
Gross weight, kg	280	395	500	670	435

Vega DG 100 H210

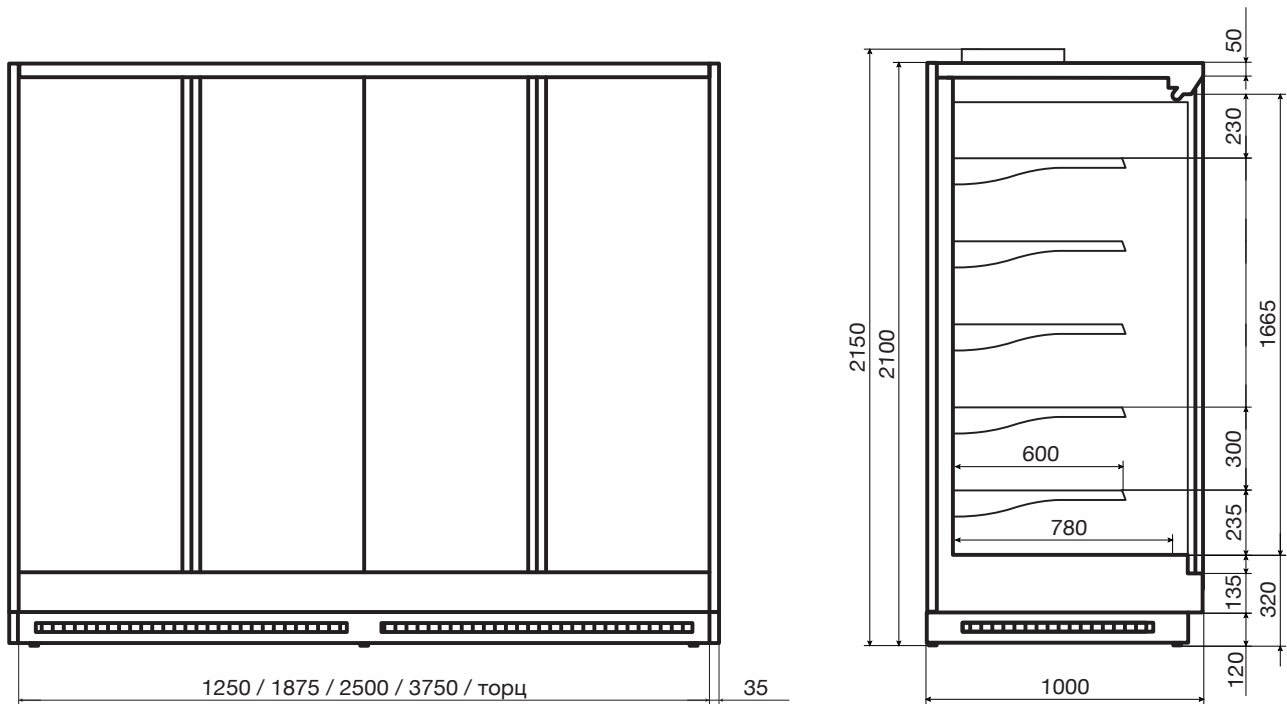

Dimensions					
Size type	125	190	250	375	end type
Display unit length without sidewalls, mm	1250	1875	2500	3750	1980
Display unit length with sidewalls, mm	1320	1945	2570	3820	2050
Display unit width, mm	1000				
Display unit height, mm	2100				
Depth of displayed products, mm	600				
Bottom shelf depth, mm	780				
Loaded area, m²	5,5	8,3	11,0	16,4	8,7
Load volume, m³	1,28	1,94	2,55	3,83	2,02
Parameters					
Temperature range, °C	+1...+7				
Refrigeration capacity, kW	0,65	1,05	1,4	2,2	1,05
Power consumption, kW per 24 hours	3,59	3,8	5,89	8,19	3,75
Maximum capacity, kW	0,14	0,17	0,24	0,36	0,17
Maximum current, A	0,7	0,7	1,21	1,54	0,7
Voltage, V	220				
Packaging					
Packaging width, mm	1175				
Packaging height, mm	2320				
Packaging length, mm	1490	2110	2740	4010	2240
Net weight, kg	250	365	460	580	375
Gross weight, kg	310	415	520	650	460



Vega 090 H160



Refrigerated shelving unit Vega will fit perfectly into an interior of any style.

Ergonomic design expands front-facing exposition to its maximum capacity and allows for displaying products on 3 lines of shelves. Innovative design solutions enhance energy efficiency. Various versions with different temperature profiles help to choose the ideal conditions for storing any fresh products.

The top lighting of the cabinet provides even distribution of light throughout the display and visibility of each product, thus guaranteeing effective presentation of the goods.

The wide range of accessories helps to customize the display cabinet to suit the shop's needs, makes the displayed products more attractive and optimizes the costs.





Standard version

- Innovative evaporator Sest, Italy
- Controller
- 3 lines of shelves with price tag holders
- Front color panels
- LED lighting in the top

Options

- See-through sidewalls or metal sidewalls with a mirror
- Additional LED lighting on the shelves
- Plexiglass internal volume partition
- Shelf space partition
- Wire fences
- Everything necessary to join cabinets in a line
- Electrical defrosting
- Everything necessary for displaying fruit
- Internal volume painted standard RAL colors
- Reinforced wooden packaging



Standard colors

Painted front panels



Custom-made version

Front panel painted any color from RAL chart

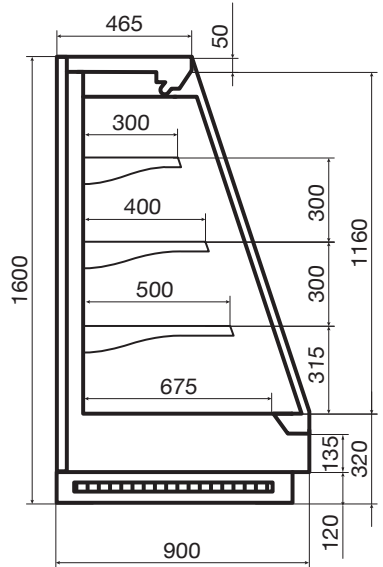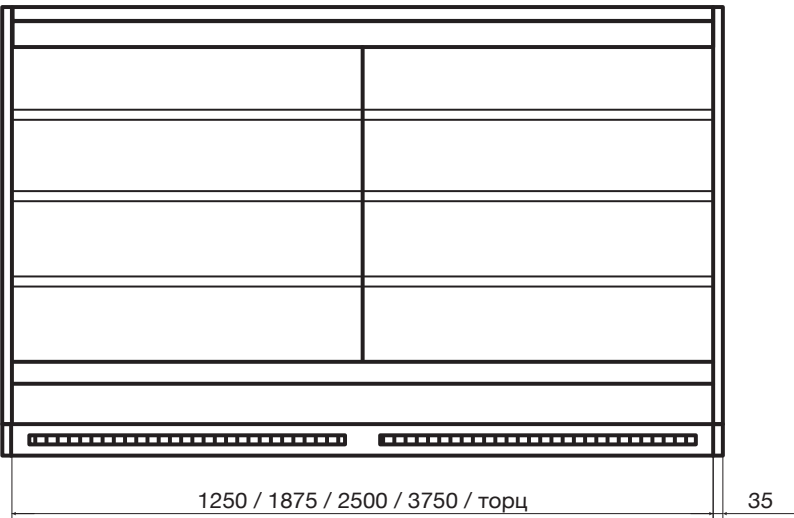

Dimensions					
Size type	125	190	250	375	end type
Display unit length without sidewalls, mm	1250	1875	2500	3750	1780
Display unit length with sidewalls, mm	1320	1945	2570	3820	1850
Display unit width, mm	900				
Display unit height, mm	1600				
Depth of displayed products, mm	675 / 500 / 400 / 300				
Bottom shelf depth, mm	675				
Loaded area, m²	2,35	3,52	4,7	7	3,34
Load volume, m³	0,67	1	1,34	2	0,95
Parameters					
Temperature range, °C	+1...+7				
Refrigeration capacity, kW	1,4	2,2	3	4,5	2,1
Power consumption, kW per 24 hours	2,96	3,05	4,67	6,37	3,11
Maximum capacity, kW	0,11	0,12	0,21	0,26	0,12
Temperature range, °C	−1...+2				
Refrigeration capacity, kW	1,64	2,58	3,5	5,3	2,46
Power consumption, kW per 24 hours	2,97	4,36	5,94	8,92	4,36
Maximum capacity, kW	0,11	0,17	0,24	0,36	0,17
Maximum current, A	0,61	0,61	0,89	1,21	0,61
Voltage, V	220				
Packaging					
Packaging width, mm	1075				
Packaging height, mm	1800				
Packaging length, mm	1490	2110	2740	4010	1990
Net weight, kg	160	225	290	400	255
Gross weight, kg	195	280	345	450	310

Dazzl™ reserves the right to modify equipment specifications and design without prior notice.

Vega DG 090 H160



Medium-temperature refrigerated shelving unit with energy-saving doors.

DG (double-glazed unit) provides full visibility and easy access to products combined with the most optimum performance.

The energy-saving coating reduces the infiltration of cold air from the inner volume of the cabinet into the sales area and contributes to extremely efficient operation.

The wide range of accessories allows you to customize the display case to meet the needs of the store, enhance the attractiveness of the layout and optimize costs.





Standard version

- Energy-efficient door system DG made from insulated glass units with a low-emission coating
- Innovative evaporator Sest, Italy
- Controller
- 3 lines of shelves with price tag holders
- Front color panels
- LED lighting in the top

Options

- See-through sidewalls or metal sidewalls with a mirror
- Additional LED lighting on the shelves
- Plexiglass internal volume partition
- Shelf space partition
- Wire fences
- Everything necessary to join cabinets in a line
- Electrical defrosting
- Everything necessary for displaying fruit
- Internal volume painted standard RAL colors
- Reinforced wooden packaging



Standard colors

Painted front panels



Custom-made version

Front panel painted any color from RAL chart

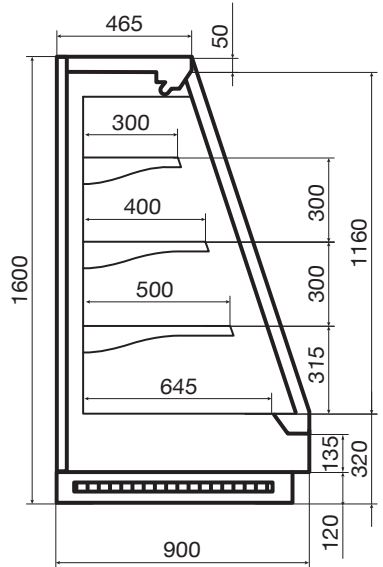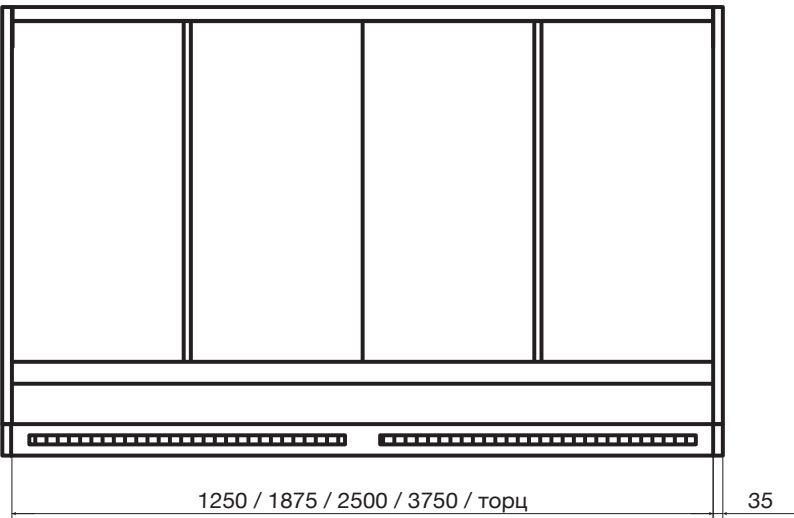

Dimensions					
Size type	125	190	250	375	end type
Display unit length without sidewalls, mm	1250	1875	2500	3750	1780
Display unit length with sidewalls, mm	1320	1945	2570	3820	1850
Display unit width, mm	900				
Display unit height, mm	1600				
Depth of displayed products, mm	500 / 400 / 300				
Bottom shelf depth, mm	645				
Loaded area, m²	2,4	3,5	4,7	6,9	3,3
Load volume, m³	0,66	0,99	1,32	1,98	0,94
Parameters					
Temperature range, °C	+1...+7				
Refrigeration capacity, kW	0,65	1,1	1,3	2,1	1,1
Power consumption, kW per 24 hours	2,97	4,36	5,94	8,92	4,36
Maximum capacity, kW	0,11	0,17	0,24	0,36	0,17
Maximum current, A	0,61	0,61	0,89	1,21	0,61
Voltage, V	220				
Packaging					
Packaging width, mm	1075				
Packaging height, mm	1800				
Packaging length, mm	1490	2110	2740	4010	2020
Net weight, kg	190	300	370	515	295
Gross weight, kg	230	330	410	550	350

Dazzl™ reserves the right to modify equipment specifications and design without prior notice.



Meat section display with various packaged products and price tags.

Product	Price
Мясо Есть	279
ЭКОЛЬ	379
Мираторг	169
Мираторг	879
Мираторг	519
Мираторг	579
Мираторг	569
Мираторг	179
Мираторг	759
Мираторг	879
Мираторг	369
Мираторг	219
Мираторг	589
Мираторг	339
Мираторг	499
Мираторг	369
Мираторг	499
Мираторг	579
Мираторг	1199
Мираторг	919
Мираторг	589

Meat section display with various packaged products and price tags.

Product	Price
Мираторг	279
Мираторг	379
Мираторг	169
Мираторг	879
Мираторг	519
Мираторг	579
Мираторг	569
Мираторг	179
Мираторг	759
Мираторг	879
Мираторг	369
Мираторг	219
Мираторг	589
Мираторг	339
Мираторг	499
Мираторг	369
Мираторг	499
Мираторг	579
Мираторг	1199
Мираторг	919
Мираторг	589



Фрукты и овощи
используются в
КАССЕ

Compass 090 H210



Minimalistic panels combined with impressive frontal exposition.

Unheated doors with triple glazing make it unnecessary to heat the outer glass.

Vertical and top lighting of the cabinet provides even distribution of light throughout the display and visibility of each product, thus guaranteeing effective presentation of the goods.

The wide range of accessories helps to customize the display cabinet to suit the shop's needs, makes the displayed products more attractive and optimizes the costs.





Standard version

- Innovative evaporator Sest, Italy
- Unheated doors with triple glazing
- Controller
- 5 lines of shelves with price tag holders
- Front color panels
- Vertical LED lighting in the internal volume

Options

- See-through or metal sidewalls
- LED lighting in the top
- Everything necessary to join cabinets in a line
- Energy-efficient fans
- Internal volume painted standard RAL colors


Standard colors

Painted front panels



Custom-made version

Front panel painted any color from RAL chart

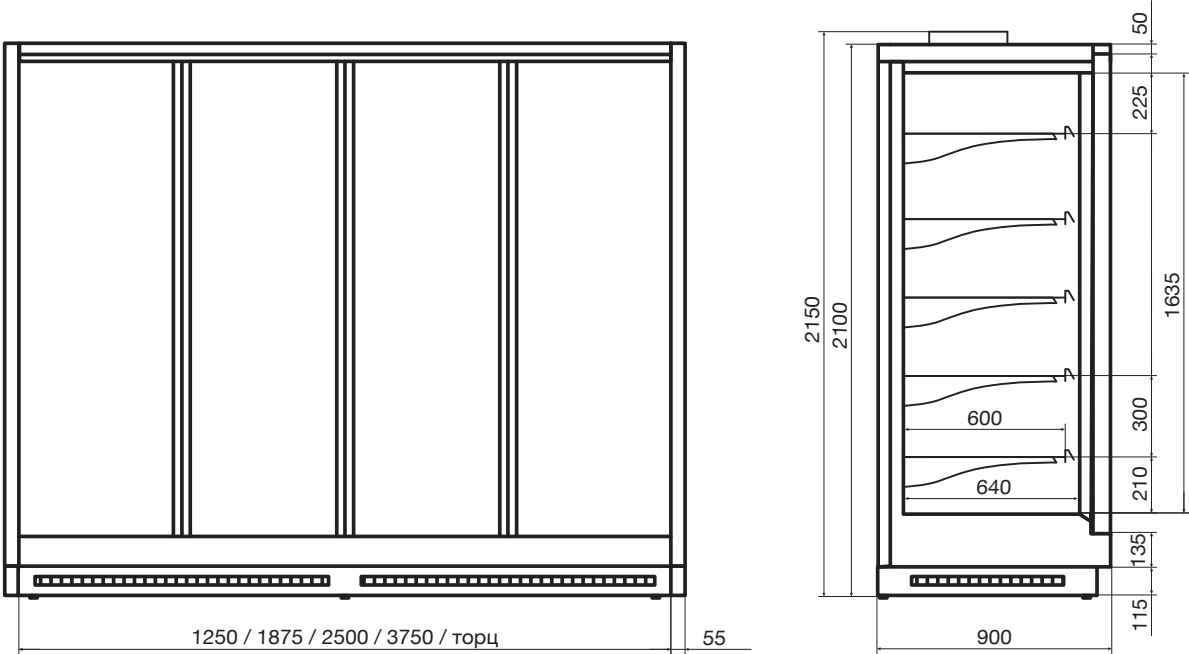

Dimensions					
Size type	125	190	250	375	end type
Display unit length without sidewalls, mm	1250	1880	2500	3750	1563
Display unit length with sidewalls, mm	1350	1980	2600	3850	1850
Display unit width, mm	900				
Display unit height, mm	2100				
Depth of displayed products, mm	600				
Bottom shelf depth, mm	630				
Loaded area, m²	5,3	8,0	10,6	15,9	6,6
Load volume, m³	1,30	1,94	2,57	3,84	1,65
Parameters					
Temperature range, °C	-22...-18				
Refrigeration capacity, kW	0,61	0,89	1,29	1,89	0,76
Power consumption, kW per 24 hours	10,95	18,05	21,95	38,05	13,02
Maximum capacity, kW	1,27	2,4	4,81	6,76	1,7
Maximum current, A	4,71	6,52	9,31	12,63	5,29
Voltage, V	380				
Packaging					
Packaging width, mm	1075				
Packaging height, mm	2320				
Packaging length, mm	1490	2120	2740	4010	1820
Net weight, kg	255	380	510	845	315
Gross weight, kg	275	415	555	920	345



Omega H210



The combined low-temperature cabinet and chest provides for both horizontal and vertical display of goods, as well as displaying both frozen products in packaging and granular goods.

The ergonomic and transparent design

significantly increases the exposure space and provides an excellent overview of the displayed goods from any part of the shop floor.

Innovative design solutions

allow you to optimize energy consumption. Energy-saving doors and horizontal Frosteco coating further reduce power consumption and ensure the convenience and reliability of the combined cabinet and chest during operation.

Energy-saving LED lighting

of the internal volumes ensures even illumination and visibility of each product, which guarantees an effective presentation of the goods.



Standard version

- Innovative evaporator Sest, Italy
- Frosteco doors with triple glazing
- Energy-saving Frosteco coating
- Controller
- 2 lines of shelves with price tag holders
- Vertical LED lighting in the internal volume
- LED lighting in the lower volume
- Front color panels

Options

- See-through or metal sidewalls
- Horizontal LED lighting in the upper volume
- Everything necessary to join cabinets in a line
- Energy-efficient fans
- Internal volume painted standard RAL colors


Standard colors

Painted front panels



Custom-made version

Front panel painted any color from RAL chart

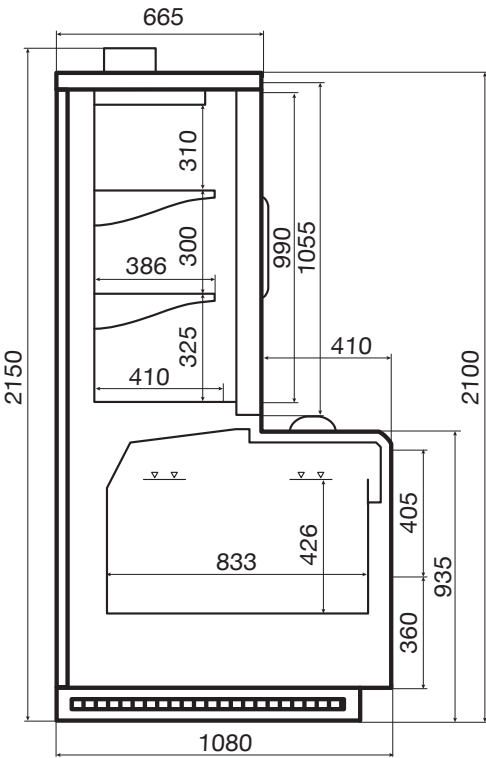

Dimensions			
Size type	250	375	end type
Display unit length without sidewalls, mm	2500	3750	2100
Display unit length with sidewalls, mm	2600	3850	2200
Display unit width, mm	900		
Display unit height, mm	2100		
Depth of displayed products (chest/cabinet), mm	833 / 390		
Bottom shelf depth (chest/cabinet), mm	833 / 405		
Loaded area (chest/cabinet), m²	2,08 / 3,9	3,12 / 5.87	1,75 / 3,3
Load volume (chest/cabinet), m³	0,89 / 0,85	1,34 / 1,28	0,75 / 0,72
Parameters			
Temperature range, °C	−22...−18		
Refrigeration capacity, kW	1,63	2,44	1,37
Power consumption, kW per 24 hours	25,3	37,3	21,5
Maximum capacity, kW	3,65	5,17	3,05
Maximum current, A	15	22	13
Voltage, V	380		
Packaging			
Packaging width, mm	1160		
Packaging height, mm	2320		
Packaging length, mm	2690	3960	2290
Net weight, kg	605	910	510
Gross weight, kg	630	945	530

Vega 080 H210 Plug-in



Offers unique merchandizing opportunities for equipment with a built-in refrigeration system.

Ergonomic design with ultra-low front expands front-facing exposition to its maximum capacity and allows for displaying products on 5 lines of shelves. Innovative design solutions enhance energy efficiency.

The top lighting of the cabinet provides even distribution of light throughout the display and visibility of each product, thus guaranteeing effective presentation of the goods.

Universal solution for a shop of any format that is unable to use a central refrigeration plant.





Standard version

- Innovative evaporator Sest, Italy
- Controller
- 5 lines of shelves with price tag holders
- Front color panels
- LED lighting in the top
- Innovative two-level condensate removal system

Options

- See-through sidewalls or metal sidewalls with a mirror
- Additional LED lighting on the shelves
- Plexiglass internal volume partition
- Shelf space partition
- Wire fences
- Everything necessary to join cabinets in a line
- Electrical defrosting
- Everything necessary for displaying fruit
- Internal volume painted standard RAL colors
- Reinforced wooden packaging


Standard colors

Painted front panels



Custom-made version

Front panel painted any color from RAL chart

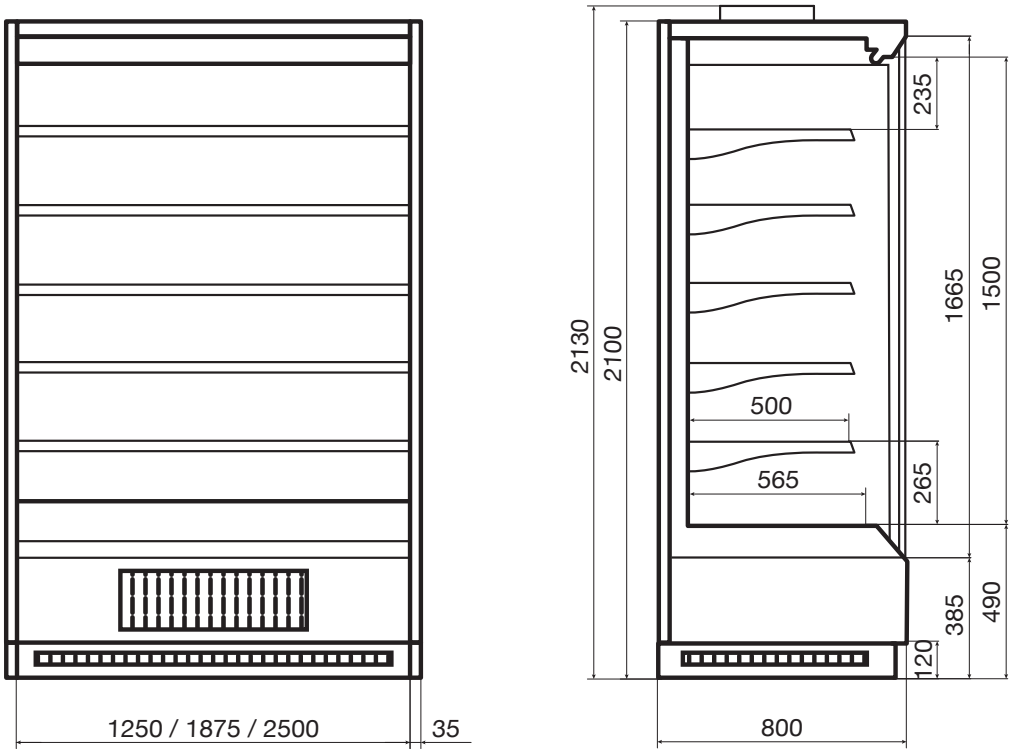

Dimensions			
Size type	125	190	250
Display unit length without sidewalls, mm	1250	1875	2500
Display unit length with sidewalls, mm	1320	1945	2570
Display unit width, mm	800		
Display unit height, mm	2100		
Depth of displayed products, mm	500		
Bottom shelf depth, mm	565		
Loaded area, m²	3,83	5,75	7,66
Load volume, m³	0,91	1,36	1,82
Parameters			
Temperature range, °C	+1...+7		
Power consumption, kW per 24 hours	34,3	43,2	68
Maximum capacity, kW	2,4	3	4,84
Temperature range, °C	-1...+2		
Refrigeration capacity, kW	34,8	43,5	68,1
Maximum capacity, kW	2,6	3,2	4,84
Maximum current, A	11	13,7	22
Voltage, V	220		
Packaging			
Packaging width, mm	970		
Packaging height, mm	2320		
Packaging length, mm	1490	2110	2740
Net weight, kg	370	560	745
Gross weight, kg	430	650	880

Vega SG 080 H210 Plug-in



Offers unique merchandizing opportunities for equipment with a built-in refrigeration system.

Ergonomic design with ultra-low front expands front-facing exposition to its maximum capacity and allows for displaying products on 5 lines of shelves. Innovative design solutions enhance energy efficiency.

The top lighting of the cabinet provides even distribution of light throughout the display and visibility of each product, thus guaranteeing effective presentation of the goods.

Universal solution for a shop of any format that is unable to use a central refrigeration plant.





Standard version

- Innovative evaporator Sest, Italy
- Controller
- 5 lines of shelves with price tag holders
- Front color panels
- LED lighting in the top
- Innovative two-level condensate removal system

Options

- See-through sidewalls or metal sidewalls with a mirror
- Additional LED lighting on the shelves
- Plexiglass internal volume partition
- Shelf space partition
- Wire fences
- Everything necessary to join cabinets in a line
- Electrical defrosting
- Everything necessary for displaying fruit
- Internal volume painted standard RAL colors
- Reinforced wooden packaging


Standard colors

Painted front panels



Custom-made version

Front panel painted any color from RAL chart

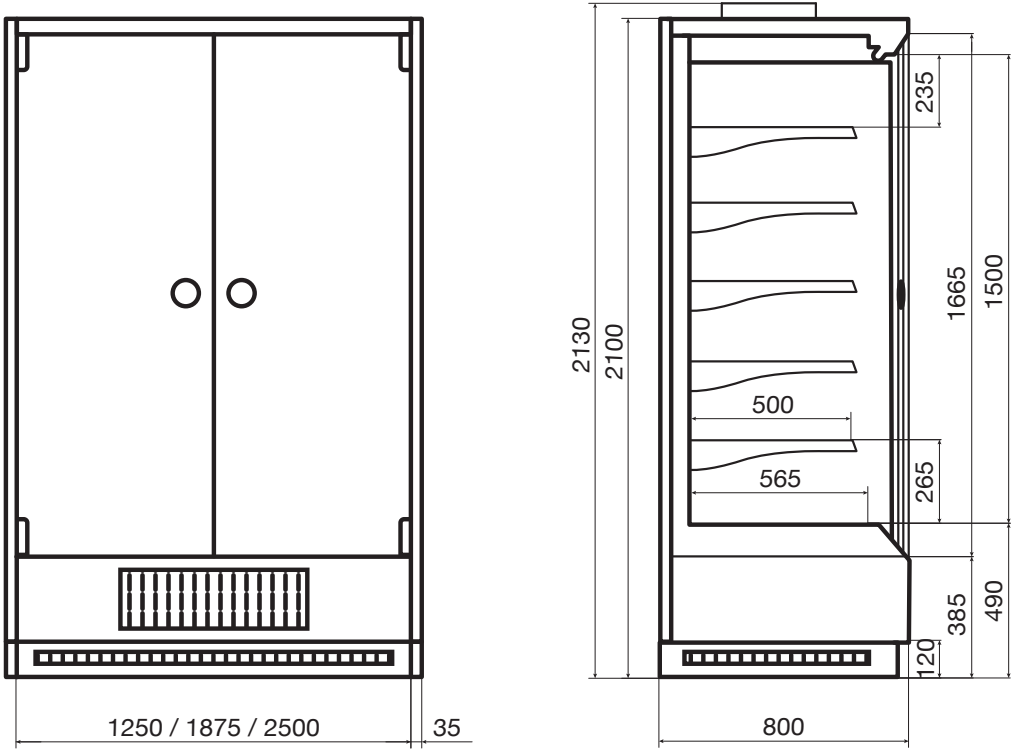

Dimensions			
Size type	125	190	250
Display unit length without sidewalls, mm	1250	1875	2500
Display unit length with sidewalls, mm	1320	1945	2570
Display unit width, mm	800		
Display unit height, mm	2100		
Depth of displayed products, mm	500		
Bottom shelf depth, mm	565		
Loaded area, m²	3,83	5,75	7,66
Load volume, m³	0,91	1,36	1,82
Parameters			
Temperature range, °C	+1...+7		
Power consumption, kW per 24 hours	16,9	26,8	34,8
Maximum capacity, kW	2,4	3	4,84
Temperature range, °C	-1...+2		
Refrigeration capacity, kW	19,3	31,1	38
Maximum capacity, kW	2,6	3,2	4,84
Maximum current, A	11	13,7	22
Voltage, V	220		
Packaging			
Packaging width, mm	970		
Packaging height, mm	2320		
Packaging length, mm	1490	2110	2740
Net weight, kg	370	560	745
Gross weight, kg	430	650	880

Vega DG 080 H210 Plug-in



Offers unique merchandizing opportunities for equipment with a built-in refrigeration system.

Ergonomic design with ultra-low front expands front-facing exposition to its maximum capacity and allows for displaying products on 5 lines of shelves. Innovative design solutions enhance energy efficiency.

The top lighting of the cabinet provides even distribution of light throughout the display and visibility of each product, thus guaranteeing effective presentation of the goods.

Universal solution for a shop of any format that is unable to use a central refrigeration plant.





Standard version

- Innovative evaporator Sest, Italy
- Controller
- 5 lines of shelves with price tag holders
- Front color panels
- LED lighting in the top
- Innovative two-level condensate removal system

Options

- See-through sidewalls or metal sidewalls with a mirror
- Additional LED lighting on the shelves
- Plexiglass internal volume partition
- Shelf space partition
- Wire fences
- Everything necessary to join cabinets in a line
- Electrical defrosting
- Everything necessary for displaying fruit
- Internal volume painted standard RAL colors
- Reinforced wooden packaging

Standard colors

Painted front panels



RAL 9003



RAL 9006



RAL 9005



RAL 3004



RAL 7024



RAL 1016



RAL 6018



RAL 3020




RAL 5017



RAL 1015

Custom-made version

Front panel painted any color from RAL chart

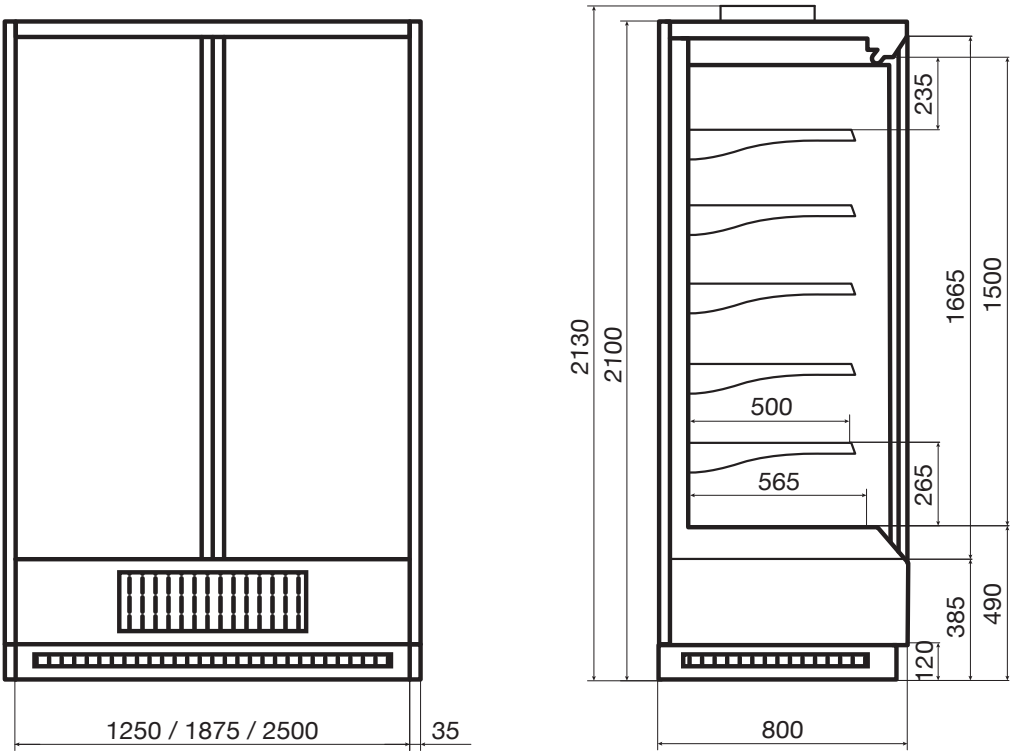

Dimensions			
Size type	125	190	250
Display unit length without sidewalls, mm	1250	1875	2500
Display unit length with sidewalls, mm	1320	1945	2570
Display unit width, mm	800		
Display unit height, mm	2100		
Depth of displayed products, mm	500		
Bottom shelf depth, mm	565		
Loaded area, m²	3,83	5,75	7,66
Load volume, m³	0,91	1,36	1,82
Parameters			
Temperature range, °C	+1...+7		
Power consumption, kW per 24 hours	16,9	26,8	34,8
Maximum capacity, kW	2,4	3	4,84
Temperature range, °C	−1...+2		
Refrigeration capacity, kW	19,3	31,1	38
Maximum capacity, kW	2,6	3,2	4,84
Maximum current, A	11	13,7	22
Voltage, V	220		
Packaging			
Packaging width, mm	970		
Packaging height, mm	2320		
Packaging length, mm	1490	2110	2740
Net weight, kg	370	560	745
Gross weight, kg	430	650	880

Готовые блюда
для экономии вашего времени

Просто. Быстро. Вкусно.



ЭЛЕКТРОННЫЕ ЧЕКИ
ВМЕСТО БУМАЖНЫХ
ЭТО ТАК УДОБНО!

Vega 070 H195 Plug-in



Offers unique merchandizing opportunities for equipment with a built-in refrigeration system.

Ergonomic design expands front-facing exposition to its maximum capacity and allows for displaying products on 4 lines of shelves. Innovative design solutions enhance energy efficiency.

The top lighting of the cabinet provides even distribution of light throughout the display and visibility of each product, thus guaranteeing effective presentation of the goods.

Universal solution for a shop of any format that is unable to use a central refrigeration plant.





Standard version

- Innovative evaporator Sest, Italy
- Controller
- 4 lines of shelves with price tag holders
- Front color panels
- LED lighting in the top
- A set of curtains
- See-through sidewalls
- Reinforced wooden packaging


Standard colors

Painted front panels



Custom-made version

Front panel painted any color from RAL chart

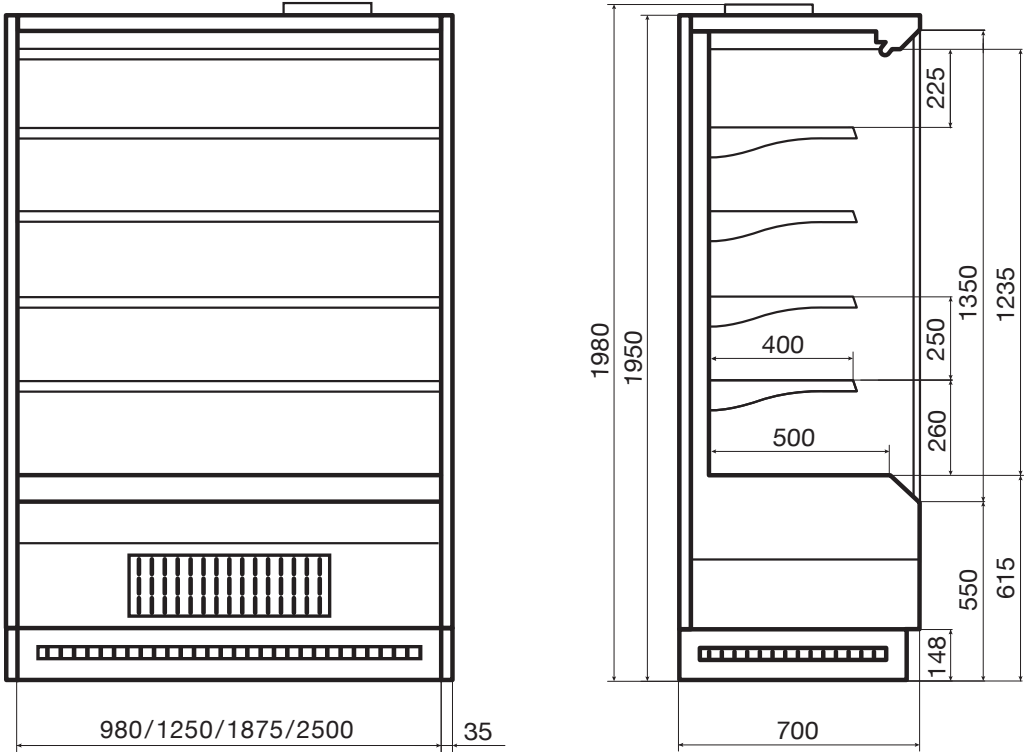

Dimensions				
Size type	100	125	190	250
Display unit length without sidewalls, mm	980	1250	1875	2500
Display unit length with sidewalls, mm	1050	1320	1945	2570
Display unit width, mm	700			
Display unit height, mm	1950			
Depth of displayed products, mm	400 (500)			
Bottom shelf depth, mm	500			
Loaded area, m²	2,0	2,57	3,87	5,18
Load volume, m³	0,40	0,51	0,77	1,04
Parameters				
Temperature range, °C	0...+7			
Power consumption, kW per 24 hours	20,0	21,0	36,0	39,0
Maximum capacity, kW	2,4	2,4	2,6	4,8
Maximum current, A	11,0	11,0	12,0	22,0
Voltage, V				
Packaging				
Packaging width, mm	1050			
Packaging height, mm	2145			
Packaging length, mm	1230	1500	2100	2750
Net weight, kg	190	210	275	355
Gross weight, kg	263	290	365	455

Vega SG 070 H195 Plug-in



Offers unique merchandizing opportunities for equipment with a built-in refrigeration system.

Ergonomic design expands front-facing exposition to its maximum capacity and allows for displaying products on 4 lines of shelves. Innovative design solutions enhance energy efficiency.

The top lighting of the cabinet provides even distribution of light throughout the display and visibility of each product, thus guaranteeing effective presentation of the goods.

Universal solution for a shop of any format that is unable to use a central refrigeration plant.





Standard version

- Energy-efficient door system SG.
- The doors of this system are made from 6-mm tempered glass with a low-emission hardcoat
- Innovative evaporator Sest, Italy
- Controller
- 4 lines of shelves with price tag holders
- Front color panels
- LED lighting in the top
- See-through sidewalls
- Reinforced wooden packaging

Standard colors

Painted front panels




Options

- Additional LED lighting on the shelves
- Plexiglass internal volume partition
- Wire fences
- Electrical defrosting
- Everything necessary for displaying fruit
- Internal volume painted standard RAL colors

Custom-made version

Front panel painted any color from RAL chart

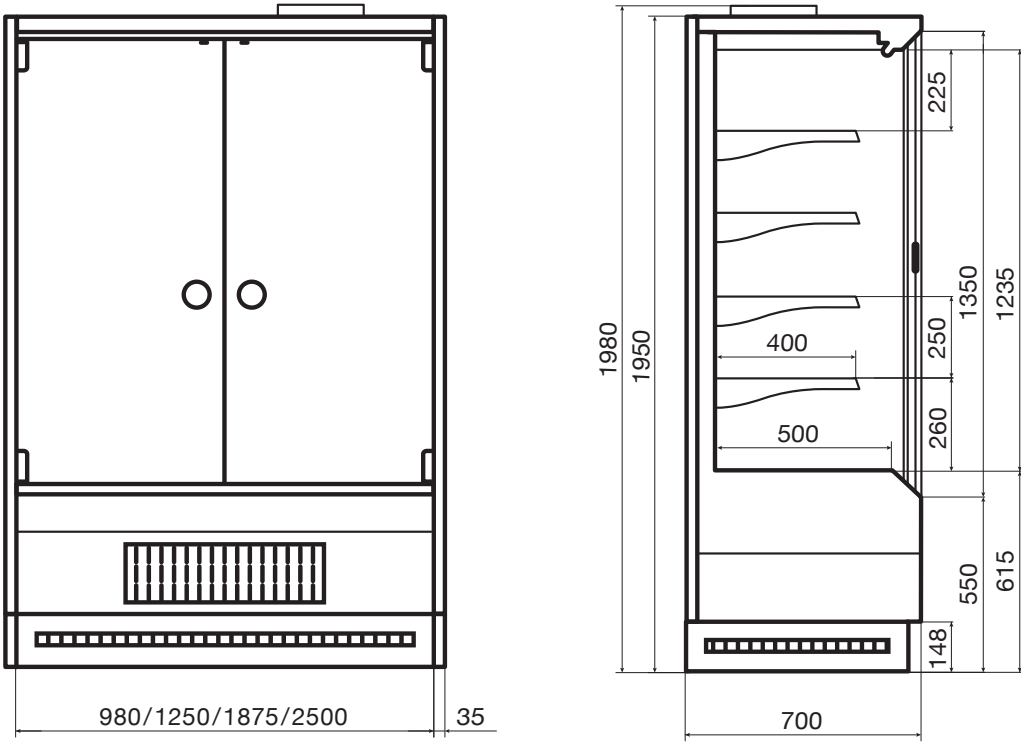

Dimensions				
Size type	100	125	190	250
Display unit length without sidewalls, mm	980	1250	1875	2500
Display unit length with sidewalls, mm	1050	1320	1945	2570
Display unit width, mm	700			
Display unit height, mm	1950			
Depth of displayed products, mm	400 (500)			
Bottom shelf depth, mm	500			
Loaded area, m²	2,0	2,57	3,87	5,18
Load volume, m³	0,40	0,51	0,77	1,04
Parameters				
Temperature range, °C	0...+7			
Power consumption, kW per 24 hours	14,0	15,0	21,0	23,0
Maximum capacity, kW	1,35	1,35	2,0	2,7
Maximum current, A	6,2	6,2	9,1	12,4
Voltage, V				
Packaging				
Packaging width, mm	1050			
Packaging height, mm	2145			
Packaging length, mm	1230	1500	2100	2750
Net weight, kg	200	220	300	370
Gross weight, kg	273	300	390	470

Vega DG 070 H195 Plug-in



Offers unique merchandizing opportunities for equipment with a built-in refrigeration system.

Ergonomic design expands front-facing exposition to its maximum capacity and allows for displaying products on 4 lines of shelves. Innovative design solutions enhance energy efficiency.

The top lighting of the cabinet provides even distribution of light throughout the display and visibility of each product, thus guaranteeing effective presentation of the goods.

Universal solution for a shop of any format that is unable to use a central refrigeration plant.





Standard version

- Energy-efficient door system DG made from insulated glass units with a low-emission coating
- Innovative evaporator Sest, Italy
- Controller
- 4 lines of shelves with price tag holders
- Front color panels
- LED lighting in the top
- See-through sidewalls
- Reinforced wooden packaging

Standard colors

Painted front panels




Options

- Additional LED lighting on the shelves
- Plexiglass internal volume partition
- Wire fences
- Electrical defrosting
- Everything necessary for displaying fruit
- Internal volume painted standard RAL colors

Custom-made version

Front panel painted any color from RAL chart

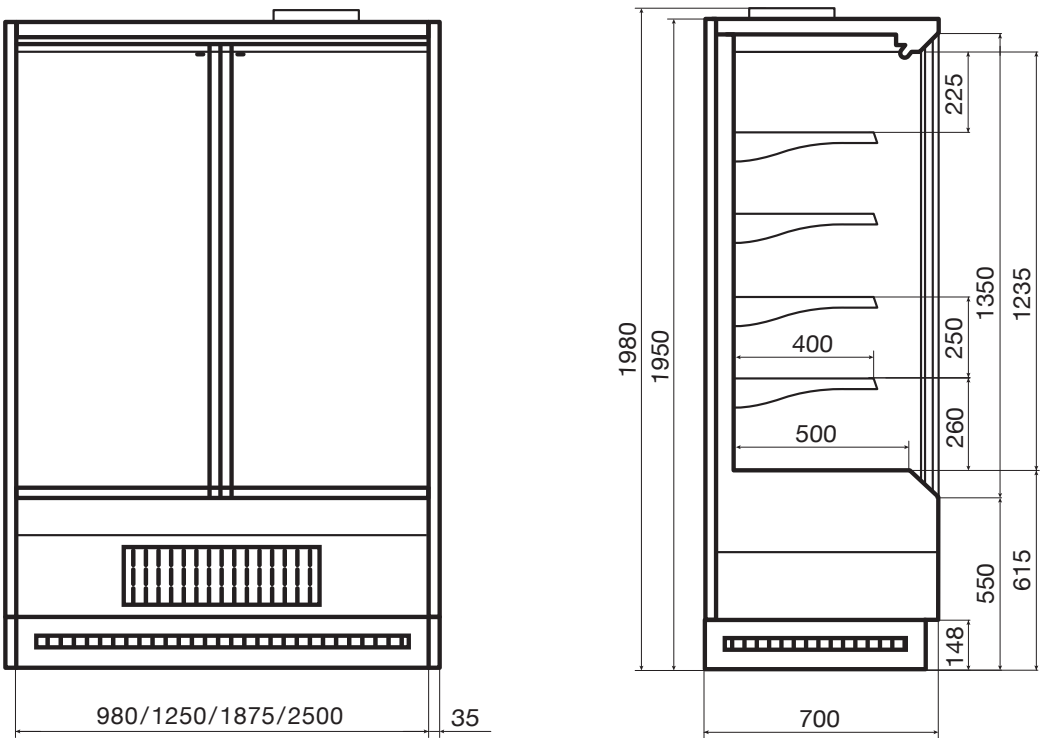

Dimensions				
Size type	100	125	190	250
Display unit length without sidewalls, mm	980	1250	1875	2500
Display unit length with sidewalls, mm	1050	1320	1945	2570
Display unit width, mm	700			
Display unit height, mm	1950			
Depth of displayed products, mm	400 (500)			
Bottom shelf depth, mm	500			
Loaded area, m²	2,0	2,57	3,87	5,18
Load volume, m³	0,4	0,51	0,77	1,04
Parameters				
Temperature range, °C	-5...+5			
Power consumption, kW per 24 hours	16,0	17,0	21,0	23,0
Maximum capacity, kW	1,35	2,4	2,6	2,6
Maximum current, A	6,2	11,0	12,0	12,0
Voltage, V				
Packaging				
Packaging width, mm	1050			
Packaging height, mm	2145			
Packaging length, mm	1230	1500	2100	2750
Net weight, kg	225	250	330	410
Gross weight, kg	298	330	420	510

Vega 080 H160 Plug-in



Offers unique merchandizing opportunities for equipment with a built-in refrigeration system.

Ergonomic design expands front-facing exposition to its maximum capacity and allows for displaying products on 4 lines of shelves. Innovative design solutions enhance energy efficiency. Versions with different temperature modes provide ideal conditions for storing any fresh produce.

The top lighting of the cabinet provides even distribution of light throughout the display and visibility of each product, thus guaranteeing effective presentation of the goods.

Self-contained equipment is a universal solution for a shop of any format that is unable to use a central refrigeration plant.





Standard version

- Innovative evaporator Sest, Italy
- Controller
- 3 lines of shelves with price tag holders
- Front color panels
- LED lighting in the top
- Innovative two-level condensate removal system

Options

- See-through sidewalls or metal sidewalls with a mirror
- Additional LED lighting on the shelves
- Plexiglass internal volume partition
- Shelf space partition
- Wire fences
- Everything necessary to join cabinets in a line
- Electrical defrosting
- Everything necessary for displaying fruit
- Internal volume painted standard RAL colors
- Reinforced wooden packaging

Standard colors

Painted front panels



RAL 9003



RAL 9006



RAL 9005



RAL 3004



RAL 7024



RAL 1016



RAL 6018



RAL 3020




RAL 5017



RAL 1015

Custom-made version

Front panel painted any color from RAL chart

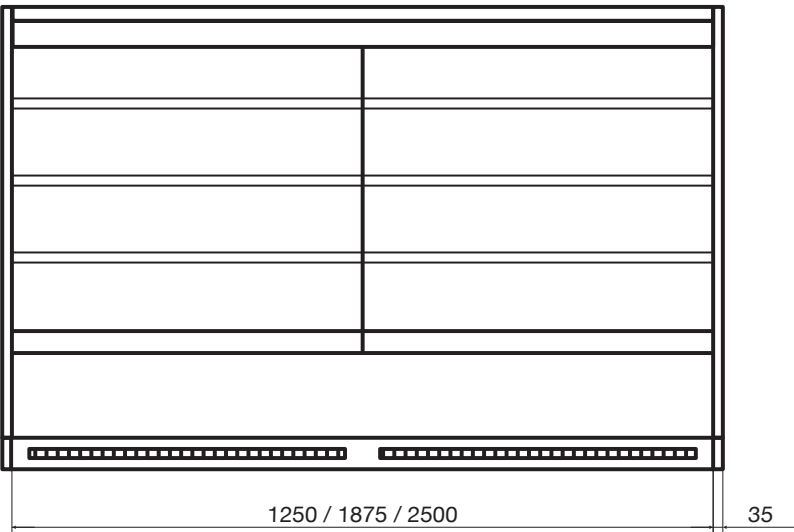

Dimensions				
Size type	90	125	190	250
Display unit length without sidewalls, mm	935	1250	1875	2500
Display unit length with sidewalls, mm	1005	1320	1945	2570
Display unit width, mm	800			
Display unit height, mm	1650			
Depth of displayed products, mm	500 / 400 / 300			
Bottom shelf depth, mm	565			
Loaded area, m²	2	2,20	3,30	4,40
Load volume, m³	0,44	0,55	0,82	1,10
Parameters				
Temperature range, °C	+1...+7			
Power consumption, kW per 24 hours	8,1	12,1	19,9	22,2
Maximum capacity, kW	1,7	1,7	2,6	3,3
Temperature range, °C	-1...+2			
Power consumption, kW per 24 hours	9,7	12,1	19,9	22,2
Maximum capacity, kW	1,7	1,7	2,6	3,3
Maximum current, A	11	11	13,7	22
Voltage, V	220			
Packaging				
Packaging width, mm	970			
Packaging height, mm	1870			
Packaging length, mm	1180	1490	2110	2740
Net weight, kg	240	295	450	595
Gross weight, kg	280	345	510	670

Vega DG 080 H160 Plug-in



Unique merchandizing opportunities for equipment with a built-in refrigeration system.

DG (insulated glass unit) provides full visibility and easy access to the products together with the most optimum specifications.

Ergonomic design with ultra-low front expands front-facing exposition to its maximum capacity and allows for displaying products on 3 lines of shelves. Innovative design solutions enhance energy efficiency. .

Equipment with built-in refrigeration is a universal solution for a shop of any format that is unable to use a central refrigeration plant.





Standard version

- Energy-efficient door system DG made from insulated glass units with a low-emission coating
- Innovative evaporator Sest, Italy
- Controller
- 3 lines of shelves with price tag holders
- Front color panels
- LED lighting in the top
- Innovative two-level condensate removal system

Options

- See-through sidewalls or metal sidewalls with a mirror
- Additional LED lighting on the shelves
- Plexiglass internal volume partition
- Shelf space partition
- Wire fences
- Everything necessary to join cabinets in a line
- Electrical defrosting
- Everything necessary for displaying fruit
- Internal volume painted standard RAL colors
- Reinforced wooden packaging


Standard colors

Painted front panels

		
RAL 9003	RAL 9006	RAL 9005
		
RAL 3004	RAL 7024	RAL 1016
		
RAL 6018	RAL 3020	RAL 5017
		
RAL 1015		

Custom-made version

Front panel painted any color from RAL chart

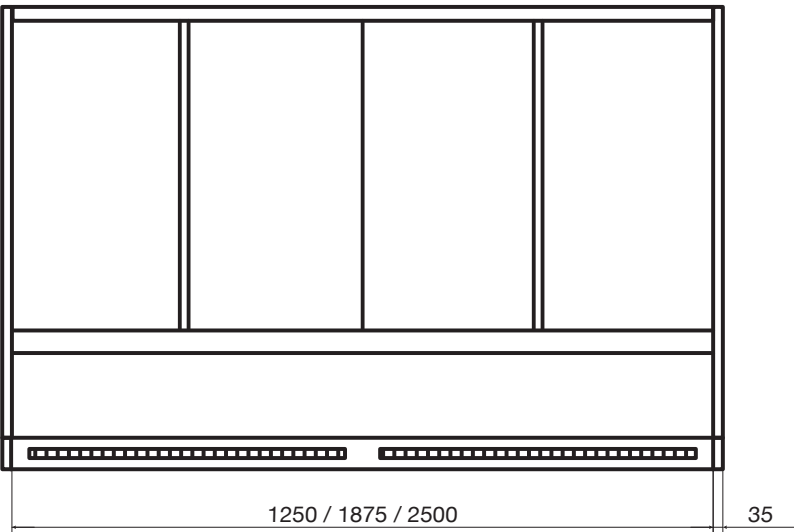

Dimensions				
Size type	90	125	190	250
Display unit length without sidewalls, mm	935	1250	1875	2500
Display unit length with sidewalls, mm	1005	1320	1945	2570
Display unit width, mm	800			
Display unit height, mm	1650			
Depth of displayed products, mm	500 / 400 / 300			
Bottom shelf depth, mm	545			
Loaded area, m²	1,95	2,18	3,27	4,36
Load volume, m³	0,41	0,53	0,80	1,00
Parameters				
Temperature range, °C	+1...+7			
Power consumption, kW per 24 hours	6,5	8,1	15,9	18,2
Maximum capacity, kW	1,7	1,7	2,6	3,3
Temperature range, °C	-1...+2			
Power consumption, kW per 24 hours	8,1	10,1	17,9	20,2
Maximum capacity, kW	1,7	1,7	2,6	3,3
Maximum current, A	11	11	13,7	22
Voltage, V	220			
Packaging				
Packaging width, mm	970			
Packaging height, mm	1840			
Packaging length, mm	1180	1490	2110	2740
Net weight, kg	250	310	470	625
Gross weight, kg	290	360	530	700



Compass 080 H210 Plug-in



Full visibility and easy access to the products combined with the most optimum specifications.

Built-in refrigeration is a universal solution for a shop of any format that is unable to use a central refrigeration plant.

Ergonomic design with ultra-low front expands front-facing exposition to its maximum capacity and allows for displaying products on 5 lines of shelves.

The wide range of accessories helps to customize the display cabinet to suit the shop's needs, makes the displayed products more attractive and optimizes the costs.





Standard version

- Innovative evaporator Sest, Italy
- Controller
- 5 lines of shelves with price tag holders
- Front color panels
- LED lighting in the top
- Innovative two-level condensate removal system

Options

- See-through sidewalls or metal sidewalls with a mirror
- Additional LED lighting on the shelves
- Plexiglass internal volume partition
- Shelf space partition
- Wire fences
- Everything necessary to join cabinets in a line
- Electrical defrosting
- Everything necessary for displaying fruit
- Internal volume painted standard RAL colors
- Reinforced wooden packaging


Standard colors

Painted front panels



Custom-made version

Front panel painted any color from RAL chart

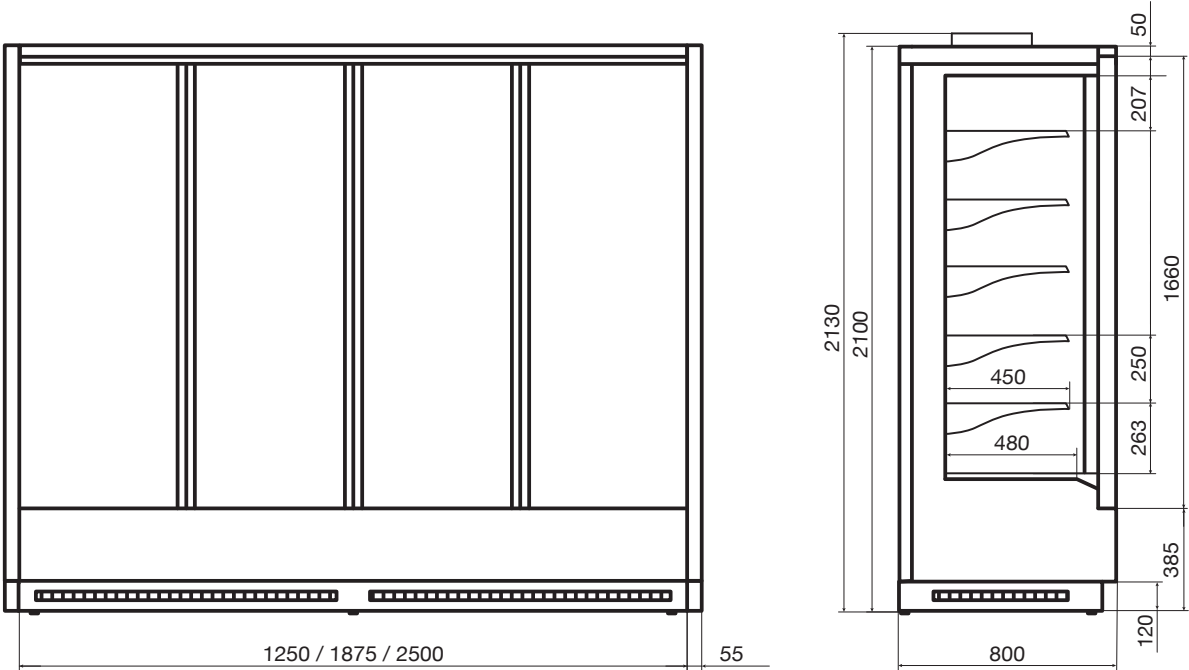

Dimensions			
Size type	125	190	250
Display unit length without sidewalls, mm	1250	1880	2500
Display unit length with sidewalls, mm	1350	1980	2600
Display unit width, mm	800		
Display unit height, mm	2100		
Depth of displayed products, mm	450		
Bottom shelf depth, mm	480		
Loaded area, m ²	3,40	5,20	6,80
Load volume, m ³	0,75	1,13	1,50
Parameters			
Temperature range, °C	-22...-18		
Power consumption, kW per 24 hours	22,2	35,6	41,5
Maximum capacity, kW	2,1	3,2	3,5
Current rating, A	8,3	13,5	14,5
Voltage, V	220		
Packaging			
Packaging width, mm	970		
Packaging height, mm	2320		
Packaging length, mm	1490	2120	2740
Net weight, kg	350	420	555
Gross weight, kg	390	465	635

Sirius



Refrigerated chest with built-in refrigeration provides full visibility and easy access to products combined with the most optimum performance.

Versatility

works in low-temperature and medium-temperature modes

The ergonomic and transparent design

maximizes the exposure and provides an excellent overview of the product display from anywhere in the sales area.

The energy-saving LED illumination

of the internal enclosure ensures uniform illumination and visibility of each product, which guarantees an effective presentation of the goods.



Standard version

- Energy-saving Frosteco coating
- Innovative evaporator and condenser Sest, Italy
- Forced air circulation
- Controller
- Front color panels, choice of colors for internal enclosure
- Gratings for displaying products
- Set of price tag holders
- Energy-saving LED lighting of the internal enclosure
- Innovative two-level condensate removal system
- Full-view sidewalls
- Reinforced wooden packaging

Options

- Twolevel superstructure with energy-saving LED lighting
- Wire internal volume partitions
- Protective bumper
- Wheels

Standard colors



Painted front panels



Custom-made version

Front panel painted any color from RAL chart

Опция двухуровневая суперструктура

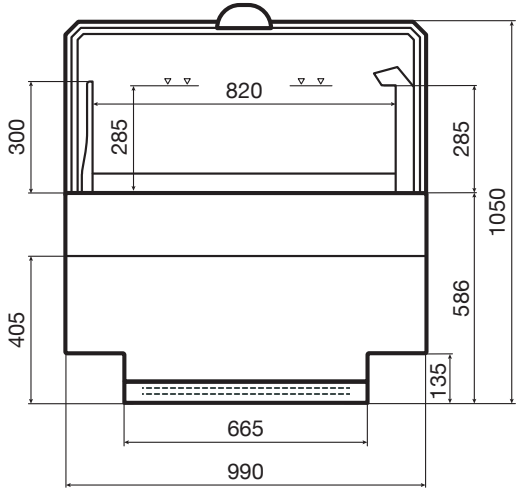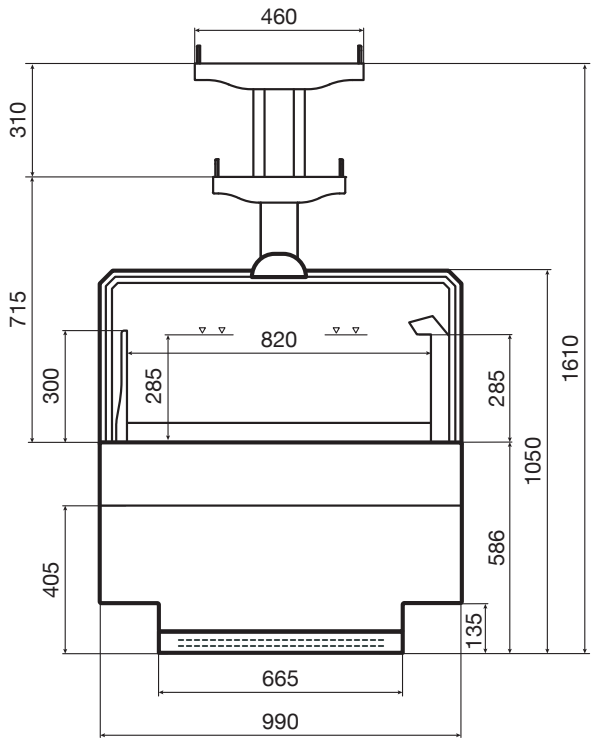

Dimensions			
Size type	125	190	250
Display unit length without sidewalls, mm	1250	1875	2500
Display unit length with sidewalls, mm	1350	1975	2600
Display unit width, mm	990		
Display unit height, mm	1050		
Depth of displayed products, mm	820		
Loaded area, m²	1,02	1,54	2,05
Load volume, m³	0,29	0,44	0,58
Parameters			
Temperature range, °C	-1...+5		
Power consumption, kW per 24 hours	9,2	11,2	12,8
Maximum capacity, kW	1,543	2,241	2,962
Consumption current, up to, A	8,83	12,8	17,46
Temperature range, °C	-22...-18		
Power consumption, kW per 24 hours	14,8	18,3	22,4
Maximum capacity, kW	1,543	2,241	2,962
Consumption current, up to, A	8,83	12,8	17,46
Voltage, V	220		
Packaging			
Packaging width, mm	1160		
Packaging height, mm	1270		
Packaging length, mm	1490	2110	2740
Net weight, kg	296	395	456
Gross weight, kg	325	430	505

Astra



A refrigerated chest with an integrated refrigeration unit, Astra provides unique merchandising opportunities. It is ideal for stores of all formats.

The versatility

of installation both against the wall and in the form of an island using the end type of the new module, as well as with the installation of various superstructure options.

The spherical energy-saving coating

allows you to further reduce power consumption, while ensuring the convenience and reliability of the chest during operation.

The energy-saving LED lighting

of the internal volume ensures uniform illumination and visibility of each product, which guarantees an effective presentation of the goods.



Standard version

- LED backlight inside the volume
- Hot gas automatic defrost system
- Controller with a slot for network card
- Set of wire dividers and gratings
- Upper shockproof bumper
- Height - adjustable supports
- Price tag holders
- Refrigeration circuit R290

Options

- A set of baskets
- Superstructure with a choice of options: one-sided or two-sided, as well as a two-level or three-level option
- LED lighting of the superstructure
- Additional lower impact-resistant bumper
- Decorative panels for installation in the island


Standard colors

Painted front panels



Custom-made version

Front panel painted any color from RAL chart

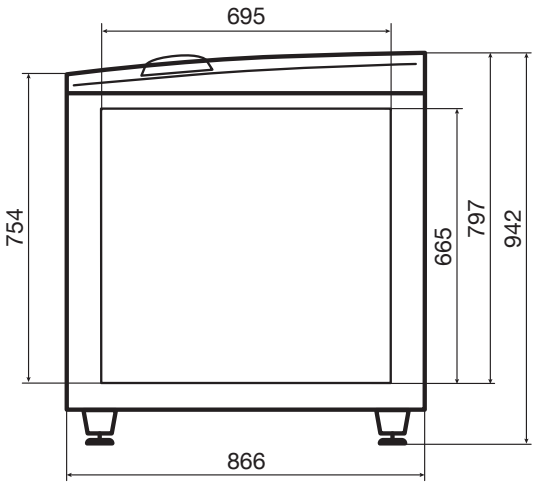

Dimensions				
Size type	190	210	250	190 end type
Display unit length with sidewalls, mm	1900	2100	2500	1900
Display unit width, mm	872			
Display unit height, mm	942 (892 end type)			
Depth of displayed products, mm	545 (495 end type)			
Loaded area, m²	0,75	0,85	1,00	0,72
Load volume, m³	0,56	0,64	0,79	0,51
Parameters HT				
Диапазон температуры, C	-20 ...-18			
Power consumption, kW per 24 hours	< 8,0	<9	<9	<8
Maximum capacity, kW	0,4	0,45	0,5	0,4
Consumption current, up to, A	2,27	3,18	3,18	2,27
Voltage, V	230			
Parameters CT				
Диапазон температуры, C	-2 ...+2			
Power consumption, kW per 24 hours	<3,5	<4	<4	<3,5
Maximum capacity, kW	0,4	0,45	0,5	0,4
Consumption current, up to, A	2,27	3,18	3,18	2,27
Voltage, V	230			
Packaging				
Packaging width, mm	916	916	916	916
Packaging height, mm	1120	1120	1120	1120
Packaging length, mm	1960	2560	2560	1960
Net weight, kg	145	165	180	140
Gross weight, kg	170	180	205	165

Luna



The vertical low-temperature module with a built-in refrigeration unit provides excellent access to products and optimal storage of frozen food.

Integration with any chests

its own supporting structure and expansion of the product display without increasing the occupied retail space.

The universal solution

is ideal for stores of any format, both for upgrading existing salesrooms and for new projects.

The impeccable functionality and elegant design

of the internal volumes ensures even lighting and visibility of each product, which guarantees an effective presentation of the product.



Standard version


- Innovative evaporator Sest, Italy
- Controller
- 2 lines of shelves with price tag holders
- Front color panels
- The internal volume can be painted RAL colors
- Vertical LED lighting of the internal enclosure
- Innovative condensate removal system
- Reinforced wooden packaging

Custom-made version

- Front panel painted any color from RAL chart

Standard colors

Painted front panels

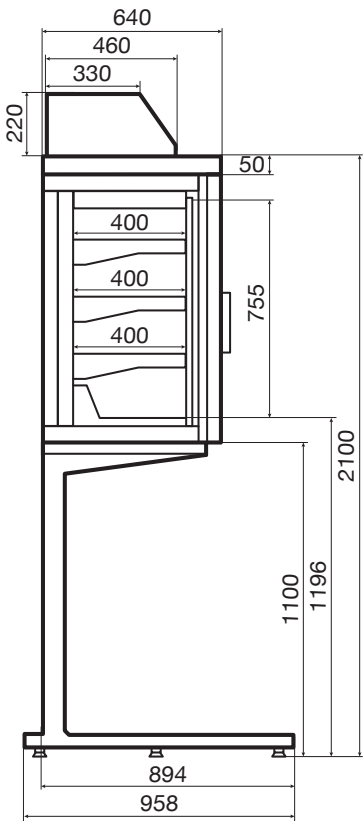

Dimensions			
Size type	190	210	250
Length of the superstructure, mm	1875	2100	2500
Width of the superstructure, mm	640/958		
Height of the superstructure, mm	2100		
Depth of displayed products, mm	400		
Bottom shelf depth, mm	345		
Loaded area, m2	2.17	2.40	2.85
Load volume, m3	0.58	0.64	0.76
Parameters			
Temperature range, °C	-22 ... -18		
Power consumption, kW per 24 hours	17.1	18.9	22.5
Maximum capacity, kW	1.6	2.5	3
Current rating, A	8.1	13.2	14.5
Voltage, V	220		
Packaging			
Packaging width, mm	1000		
Packaging height, mm	1420		
Packaging length, mm	2000	2200	2600
Net weight, kg	295	330	390
Gross weight, kg	330	380	460



Galaxy 080



Display case Galaxy has built-in and remote refrigeration equipment, dynamic and static refrigeration type, hotplates and heated versions.


Modern design

offers flat and clear-cut shapes providing an unprecedented visibility of products.

The wide range of models

guarantees the most efficient operation and the best use of the functional features of the display case.

Galaxy 080

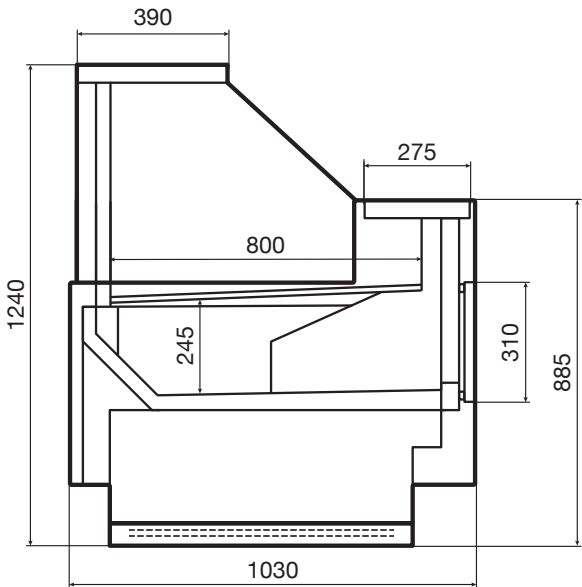

Dimensions								
Size type	94	125	150	190	250	375	Open corner	Closed corner
Display unit length without sidewalls, mm	940	1250	1420	1875	2500	3750		
Display unit length with sidewalls, mm	1010	1320	1490	1945	2570	3820	1715	1830
Display unit width, mm	1030						1105	
Display unit height, mm	1240							
Depth of displayed products, mm	800							
Load height, mm	150							
Additional storage space	yes						no	
Additional storage height, mm	200							
Shelf load, kg/m	3							
Loaded area, m2	0,75	1,0	1,14	1,5	2,0	3,0	0,85	0,84
Load volume, m3	0,11	0,15	0,17	0,23	0,30	0,45	0,13	0,13
Parameters								
Temperature range, °C	0 ... +7							
Power consumption per 24 hours, kW × hr	7,0	7,5	8,0	9,5	11,5	18,8	7,2	
Power consumption, kW	0,4		0,45	0,7		1,4	0,65	
Power supply (rated voltage – frequency – number of phases)	220 – 50 – 1							
Refrigeration capacity, kW	0,45	0,5	0,55	1,0	1,1	2,0	0,9	
Packaging								
2-tier packaging length, mm	1300	1600	1800	2300	2900	4200	2200	
2-tier packaging width, mm	1200						1360	
2-tier packaging height, mm	1145						1170	
Net weight, kg (Galaxy 080)	125	144	173	210	249	350	145	135
Net weight, kg (Galaxy 080 Plug-in)	139	161	190	228	268	358	160	150



Язык говяжий
моченый
РЕБРА
КАЛЬБИ СМОКЕР
400 гр 400

ШЕЯ
СВИНАЯ
в смолкере
100 гр 180

КОФЕИНЫЙ
РАЙЧ
390

Охорон
по Тамбовски
400 гр 200

Шей Свинная
Сыровяленная
400 гр 530

Горюшка из
Израильского Равина
сыровяченная
400 гр 500

Лорнет
400 гр 450

Боченки из
Лох-Рона
Смокер
400 гр 450

СЫР
ТОМАТ
100 гр 100

СЫР
СТРАВИКА
100 гр 100

СЫР
ЛАНЧ
100 гр 100

СЫР
ПАВ
100 гр 100

СЫР
ТОМАТ
100 гр 100

Galaxy 090




Display case Galaxy has built-in and remote refrigeration equipment, dynamic and static refrigeration type, hotplates and heated versions.

Modern design
 offers flat and clear-cut shapes providing an unprecedented visibility of products.

The wide range of models
 guarantees the most efficient operation and the best use of the functional features of the display case.

Galaxy 090

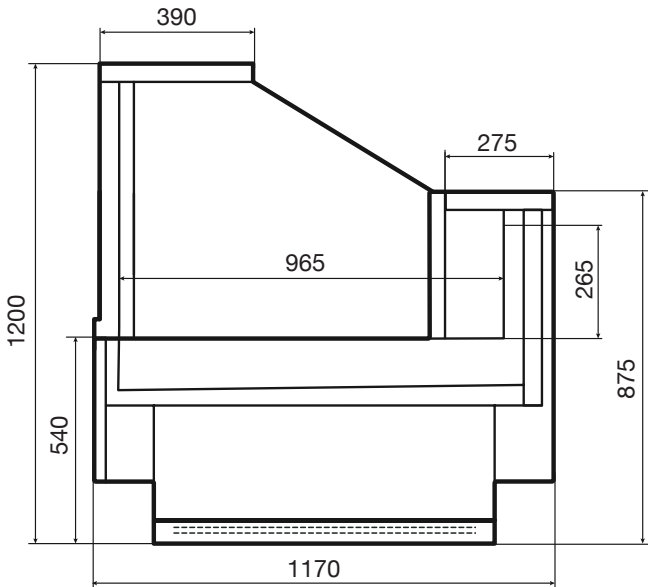

Dimensions						
Size type	125	190	250	375	Open corner	Closed corner
Display unit length without sidewalls, mm	1250	1875	2500	3750	1780	2420
Display unit length with sidewalls, mm	1310	1935	2560	3185	1840	2480
Display unit width, mm	1155				1225	1400
Display unit height, mm	1200					
Depth of displayed products, mm	965					
Loag height, mm	150					
Shelf load, kg/m	200					
Loaded area, m²	1,2	1,82	2,4	3,6	1,1	1,8
Load volume, m³	0,32	0,48	0,64	0,97	0,29	0,48
Parameters						
Temperature range, °C	+1...+10					
Power consumption per 24 hours, kW × hr	0,48	0,78	0,96	1,42	0,48	0,72
Maximum capacity, kW	0,02	0,033	0,04	0,06	0,02	0,03
Power supply (rated voltage – frequency – number of phases)	220 – 50 – 1					
Refrigeration capacity, kW	0,56	0,61	0,78	1,2	0,47	0,92
Packaging						
2-tier packaging length, mm	1600	2300	2900	4200	2200	
2-tier packaging width, mm	1200				1360	
2-tier packaging height, mm	1145				1170	
Net weight, without sidewalls, with remote refrigeration unit, kg	160	240	320	450	140	150

Stella H130



Contemporary design
in minimalist style and unrivaled transparency make products most conveniently accessible for the customers.

Extendable frame
to tilt the display case at different angles depending on the specific requirements for the product display.

Built-in refrigeration unit
guarantees excellent efficiency and power consumption characteristics.

This promo display case is perfect for various promotions, seasonal sales or presentations of new food products.




Standard version

- Innovative evaporator Sest, Italy
- Controller
- Condensate removal system
- Plexiglass sidewalls
- 2 shelves that may be installed at various heights

Options

- May be joined in a line
- Protective bumper on three sides
- Wheels h-130 mm
- Price tag holders

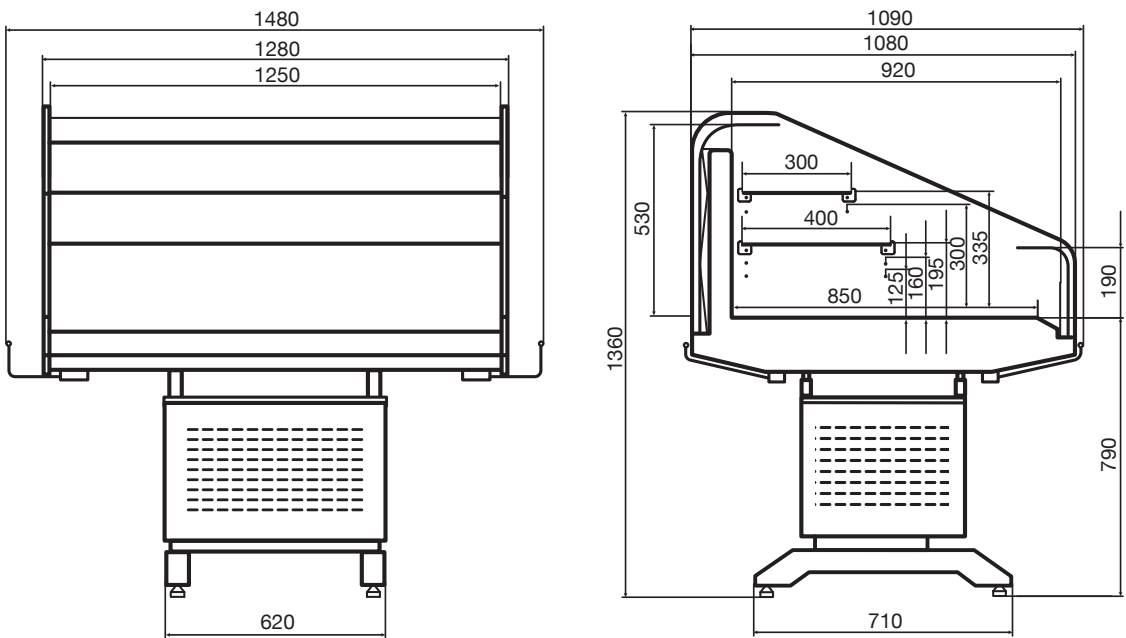

Dimensions	
Size type	125
Dislay case length/with bumper (min... max), mm	1280 / 1320...1480
Dislay case width/with bumper (min... max), mm	1080 / 1090...1170
Display unit height, mm	1360
Depth of displayed products, mm	850
Load depth, mm	100
Load volume, l	210
Load per tray, kg/m²	50
Load per suspended shelf, kg/m²	40
Parameters	
Temperature range, °C	+2 ... +4
Rated current, A	6,8
Maximum current, A	10
Rated input, W	1500
Power consumption per 24 hours, kW × hr	12,0
Power supply (rated voltage – frequency – number of phases)	220 – 50 – 1
Packaging	
Packaging length, mm	1460
Packaging width, mm	1220
Packaging height, mm	1515
Net weight, kg	147
Gross weight, kg	282

Stella H120



Contemporary design
in minimalist style and unrivaled transparency make products most conveniently accessible for the customers.

Extendable frame
to tilt the display case at different angles depending on the specific requirements for the product display.

Built-in refrigeration unit
guarantees excellent efficiency and power consumption characteristics.

This promo display case is perfect for various promotions, seasonal sales or presentations of new food products.




Standard version

- Innovative evaporator Sest, Italy
- Controller
- Condensate removal system
- Plexiglass sidewalls
- Shelf that may be installed at various heights

Options

- May be joined in a line
- Protective bumper on three sides
- Wheels h-130 mm
- Price tag holders

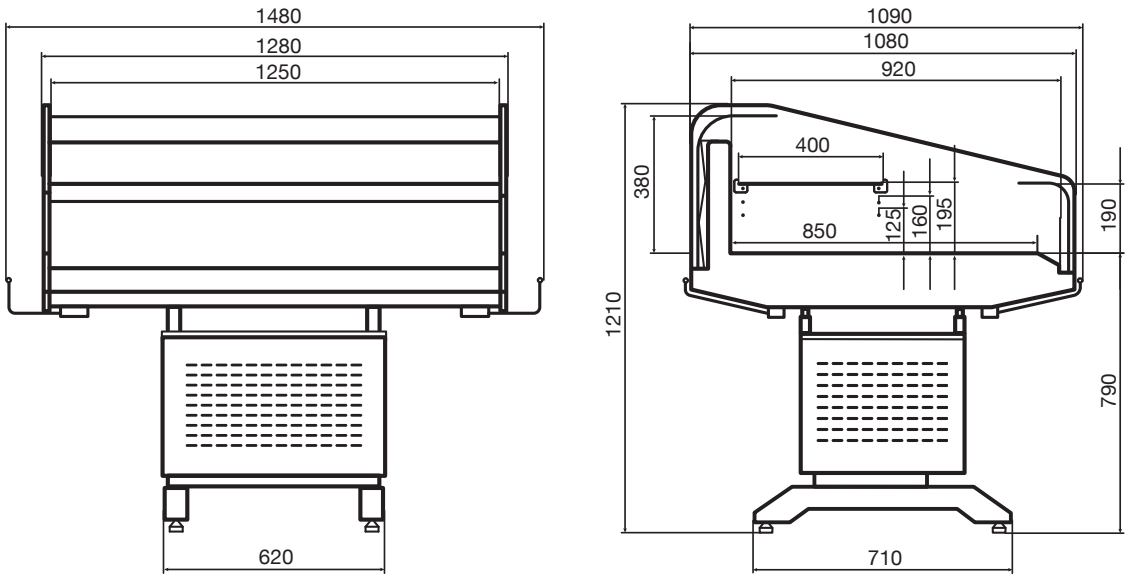

Dimensions	
Size type	125
Dislay case length/with bumper (min... max), mm	1280 / 1320...1480
Dislay case width/with bumper (min... max), mm	1080 / 1090...1170
Display unit height, mm	1210
Depth of displayed products, mm	850
Load depth, mm	100
Load volume, l	170
Load per tray, kg/m²	50
Load per suspended shelf, kg/m²	40
Parameters	
Temperature range, °C	+2 ... +4
Rated current, A	6,8
Maximum current, A	10
Rated input, W	1500
Power consumption per 24 hours, kW × hr	12,0
Power supply (rated voltage – frequency – number of phases)	220 – 50 – 1
Packaging	
Packaging length, mm	1460
Packaging width, mm	1220
Packaging height, mm	1515
Net weight, kg	139
Gross weight, kg	274

Stella H100



Contemporary design
in minimalist style and unrivaled transparency make products most conveniently accessible for the customers.

Extendable frame
to tilt the display case at different angles depending on the specific requirements for the product display.

Built-in refrigeration unit
guarantees excellent efficiency and power consumption characteristics..

This promo display case is perfect for various promotions, seasonal sales or presentations of new food products.




Standard version

- Innovative evaporator Sest, Italy
- Controller
- Condensate removal system
- Plexiglass sidewalls

Options

- May be joined in a line
- Protective bumper on three sides
- Wheels h-130 mm
- Price tag holders

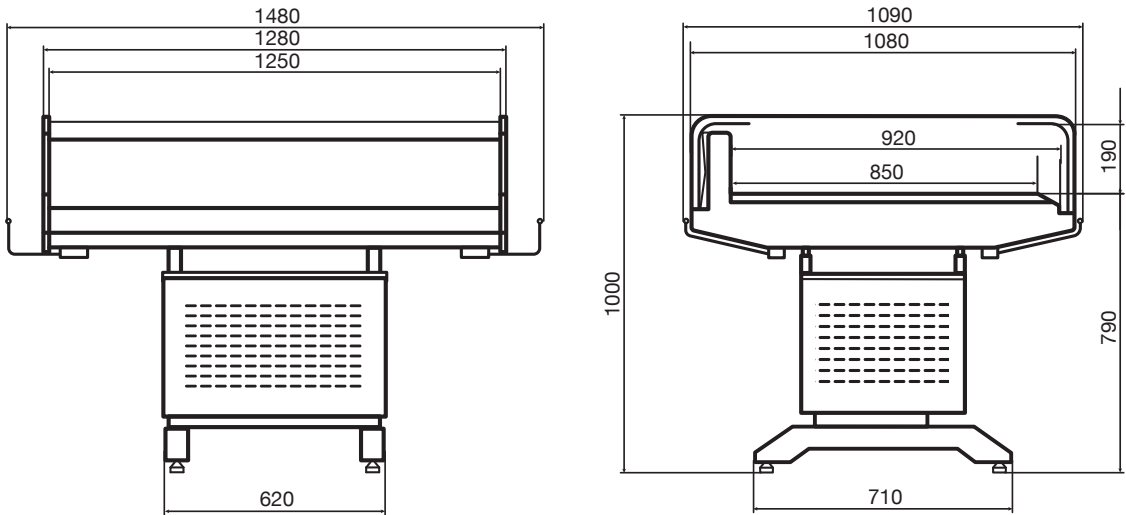

Dimensions	
Size type	125
Dislay case length/with bumper (min... max), mm	1280 / 1320...1480
Dislay case width/with bumper (min... max), mm	1080 / 1110...1260
Display unit height, mm	1000
Depth of displayed products, mm	850
Load depth, mm	100
Load volume, l	110
Load per tray, kg/m²	50
Load per suspended shelf, kg/m²	40
Parameters	
Temperature range, °C	+2 ... +4
Rated current, A	6,8
Maximum current, A	10
Rated input, W	1500
Power consumption per 24 hours, kW × hr	12,0
Power supply (rated voltage – frequency – number of phases)	220 – 50 – 1
Packaging	
Packaging length, mm	1460
Packaging width, mm	1220
Packaging height, mm	1185
Net weight, kg	118
Gross weight, kg	233

SALES OFFICE

37 Leninsky Prospekt,
building 1, 4th floor, Moscow
+7 (495) 937-64-07

PRODUCTION FACILITIES

1 Prombaza street, Volzhsk,
Mari El Republic

dazzlpro.com
info@dazzlpro.com

DAZZLPRO.COM